

WAAS CH 42512 W22A	APP CRS 221°	Rwy Ldg TDZE 422 Apt Elev 422
--	------------------------	---

RNAV (GPS) RWY 22

EVANSVILLE RGNL (EVV)

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 9 NA at night.
** RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:

Climb to 2500 direct ICINU and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9	CLNC DEL 126.6	UNICOM 122.95
----------------------	--	---	-------------------------	--------------------------	-------------------------

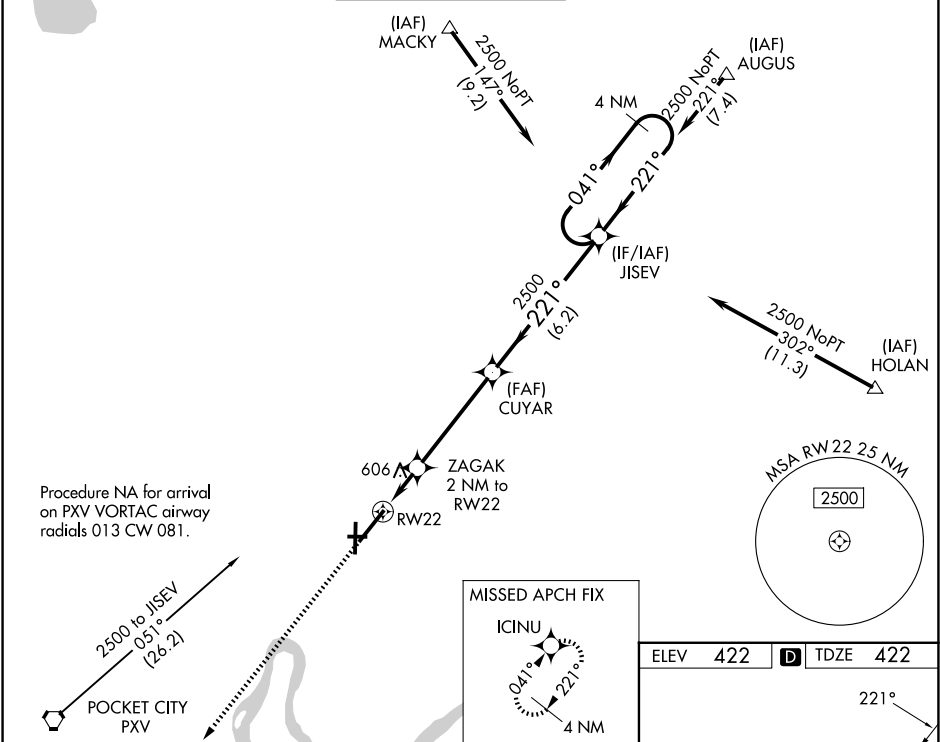

2500

↑

ICINU

✱

*LNAV only

2500

2 NM to RW22

2500

2 NM to RW22

2500

1.2 NM to RW22

2500

1.100

2500

221°

2500

221°

2500

041°

2500

221°

2500

4 NM Holding Pattern

2500

GP 3.00°

2500

TCH 50

2500

1.2 NM

0.8

4.4 NM

6.2 NM

2500

221°

2500

221°

2500

041°

2500

221°

2500

4 NM Holding Pattern

2500

GP 3.00°

2500

TCH 50

CATEGORY	A		B	C	D
LPV DA			**622/24	200 (200-½)	
LNAV/VNAV DA			840/45	418 (500-¾)	
LNAV MDA	860/24	438 (500-½)		860/40	438 (500-¾)
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)	

