
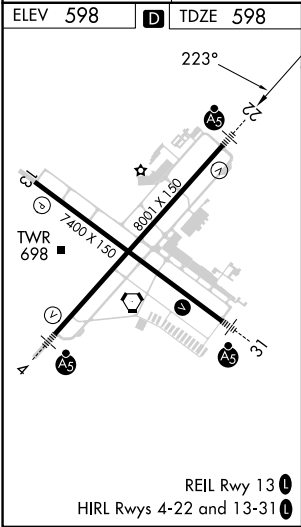


WAAS CH 81809 W22A	APP CRS 223°	Rwy Idg TDZE 598 Apt Elev 598	8001
--	------------------------	---	-------------

RNAV (GPS) RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.				MALSR 	MISSED APPROACH: Climb to 2700 direct COVAC and hold.	
ASR	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Lincoln altimeter setting: increase LPV DA to 942 feet and all visibilities ½ SM, LNAV/VNAV DA to 1108 feet and all visibilities ½ SM; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to ¾ SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to 1 SM, increase LNAV/VNAV all Cats visibility to 1 ½ SM.					
ATIS		SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1		126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	121.7	122.95

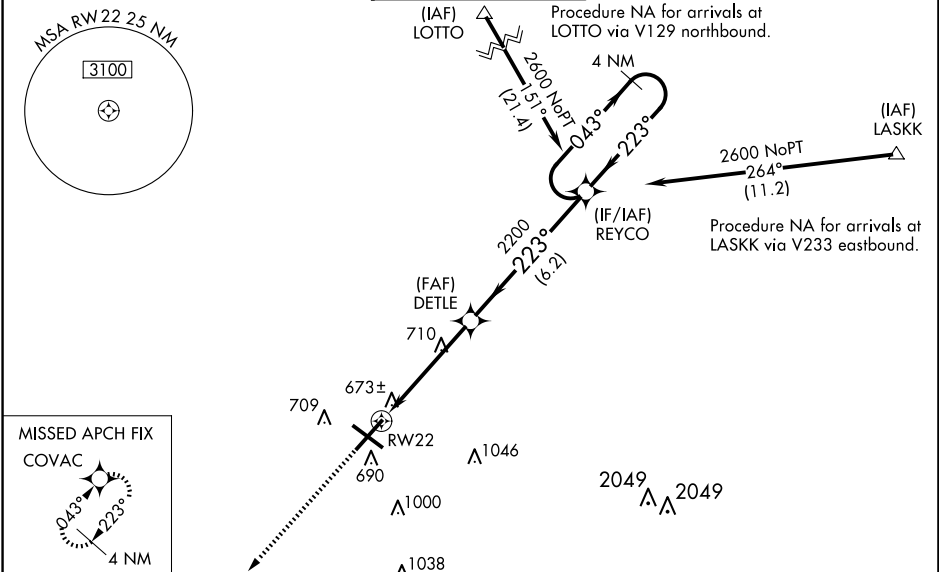

2700 ↑ COVAC					4 NM Holding Pattern				
1 NM to RW22 RW22 1 NM 3.8 NM DETLE 6.2 NM REYCO					043° → ← 223° 2600 GP 3.00° TCH 54				
CATEGORY		A		B		C		D	
LPV DA		884-½		286 (300-½)					
LNAV/VNAV DA		1050-¾		452 (500-¾)					
LNAV MDA		980-½		382 (400-½)		980-⅝		382 (400-⅝)	
CIRCLING		1040-1¼		1100-1¼		1360-2¼		1380-2½	
		442 (500-1¼)		502 (600-1¼)		762 (800-2¼)		782 (800-2½)	