
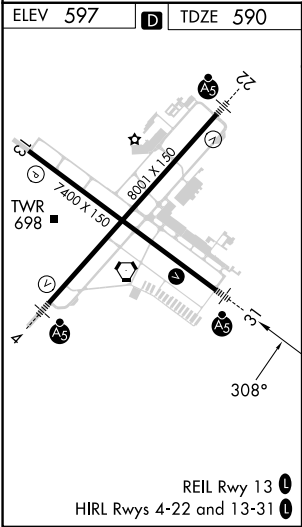


WAAS CH 90124 W31A	APP CRS 308°	Rwy Idg TDZE Apt Elev	7000 590 597
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31
ABRAHAM LINCOLN CAPITAL (SPI)

⚠ DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F). When local altimeter setting not received, use Lincoln altimeter setting: increase all DA 57 feet and MDA 60 feet, increase Circling Cat C and D visibility ¼ SM. VDP and ASR Baro-VNAV NA when using Logan County altimeter setting. For inoperative MALSR, increase LPV visibility to ¾ all Cats, increase LNAV/VNAV Cat D visibility to 1.	MALSR AS	MISSED APPROACH: Climb to 2500 direct JOPOD and hold.
---	-------------------------------	--

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

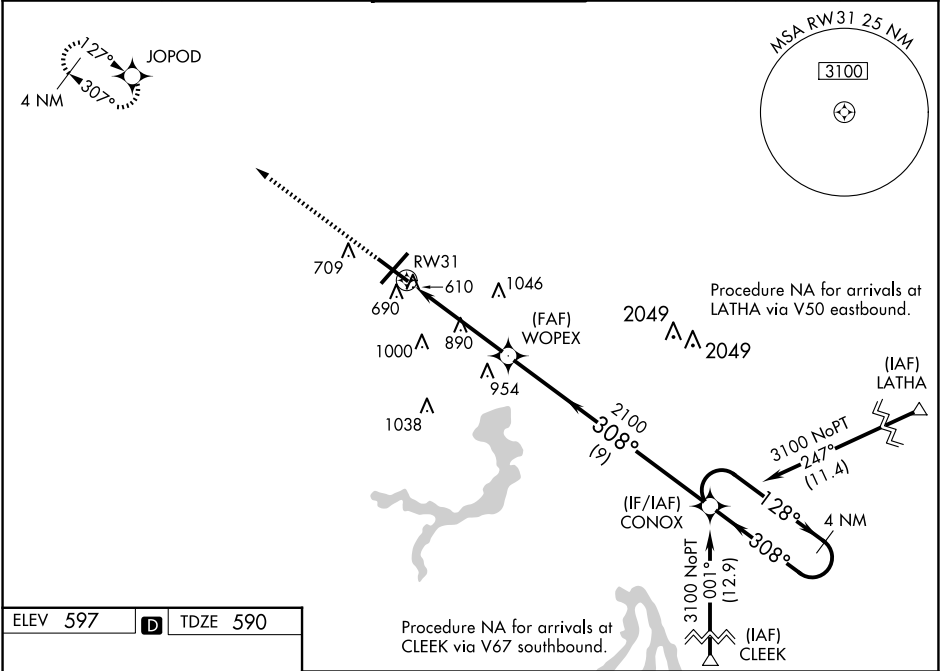

2500

JOPOD

CONOX

4 NM Holding Pattern

*LNAV only.

*1.8 NM to RW31

WOPEX

GP 3.00° TCH 55

RW31

1.8 NM

2.8 NM

9 NM

128°

308°

3100

2100

CATEGORY

A

B

C

D

LPV DA

840-½ 250 (300-½)

LNAV/VNAV DA

865-½ 275 (300-½)

865-¾ 275 (300-¾)

LNAV MDA

1200-½ 610 (700-½)

1200-¼ 610 (700-¼)

1200-½ 610 (700-½)

CIRCLING

1200-1 603 (700-1)

1360-2¼ 762 (800-2¼)

1380-2½ 782 (800-2½)