

WAAS CH 70309 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	7927 592 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to 1 3⁄8 SM. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 912 feet; increase LNAV/VNAV DA to 989 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C/D 1⁄4 SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to RVR 4500.

MALSR

⚠

MISSED APPROACH:
Climb to 2600 direct
REYCO and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 121.7	UNICOM 122.95
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

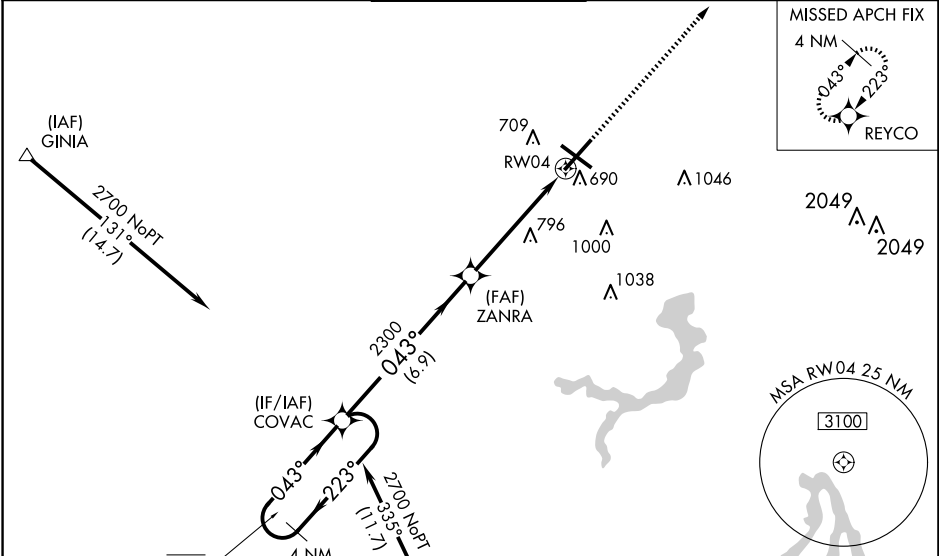

4 NM Holding Pattern

COVAC

6000 ← 223°

2700 → 043°

GP 3.00°

TCH 56

ZANRA

2300

1.3 NM to RW04

RW04

REYCO

2600

CATEGORY	A	B	C	D
LPV DA	854/24		262 (300-1⁄2)	
LNAV/VNAV DA	931/26		339 (400-1⁄2)	
LNAV MDA	1060/24	468 (500-1⁄2)	1060/50	468 (500-1)
CIRCLING	1060-1 462 (500-1)	1100-1 502 (600-1)	1360-2 1⁄4 762 (800-2 1⁄4)	1380-2 1⁄2 782 (800-2 1⁄2)

ELEV 598

TDZE 592

REIL Rwy 13

HIRL Rws 4-22 and 13-31

EC-3, 04 SEP 2025 to 02 OCT 2025

EC-3, 04 SEP 2025 to 02 OCT 2025