
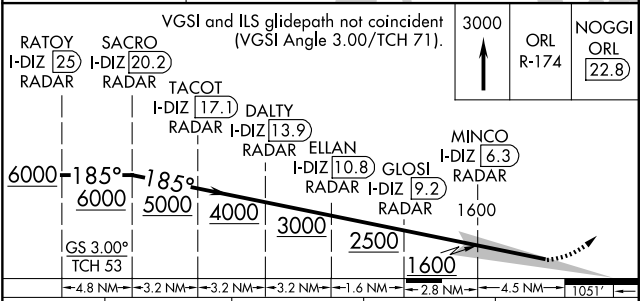


LOC/DME I-DIZ	APP CRS	Rwy Ldg
111.75	185°	10000
Chan 54 (Y)	TDZE	90
	Apt Elev	96


ILS RWY 17R (CAT II)
ORLANDO INTL (MCO)

RADAR required for procedure entry. DME or RADAR required.		ALSf-2	MISSED APPROACH: Climb to 3000 on ORL VORTAC R-174 to NOGGI/ ORL 22.8 DME and hold.
Simultaneous approach authorized. When using alternate missed approach, simultaneous approach NA. Bright lights on highway midway between Rwy 17L and Rwy 17R may be mistaken for runway lights.			

D-ATIS	ORLANDO APP CON	ORLANDO TOWER	GND CON	CLNC DEL	CPDLC
ARR 121.25	124.8 307.0	118.45 253.5 124.3 253.5	126.4 (E) 121.8 (W)	134.7 341.7	
DEF 120.525		(17L-35R, 17R-35L) (18L-36R, 18R-36L)			

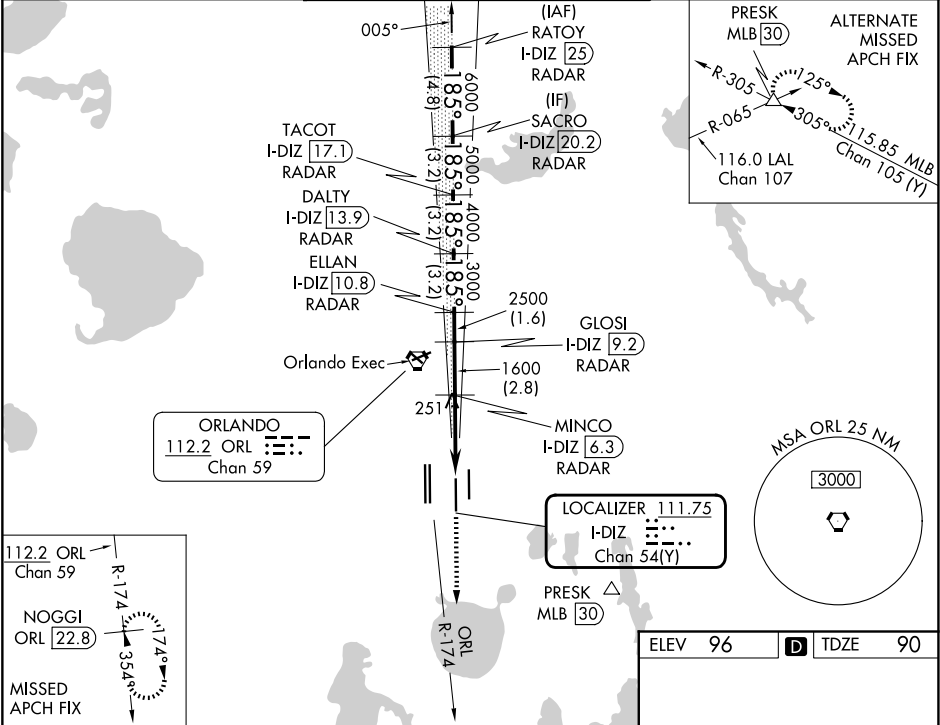

CATEGORY	A	B	C	D
S-ILS 17R				
RA 104/12	100	DA 190		
CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED				

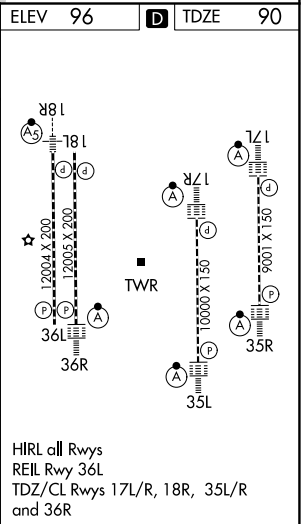

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025