

WAAS CH 66012 W18A	APP CRS 185°	Rwy Ldg 12004 TDZE 96 Apt Elev 96
--	------------------------	--



RNAV (GPS) RWY 18L
ORLANDO INTL (MCO)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 17L/R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH:
Climb to 500 then climbing right turn to 4000 direct CAMBE and hold, continue climb-in-hold to 4000.

D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L-35R, 17R-35L) 124.3 253.5 (18L-36R, 18R-36L)	GND CON 126.4 (E) 121.8 (W)	CLNC DEL 134.7 341.7	CPDLC
---	---------------------------------------	--	---	--	-------

RADAR REQUIRED

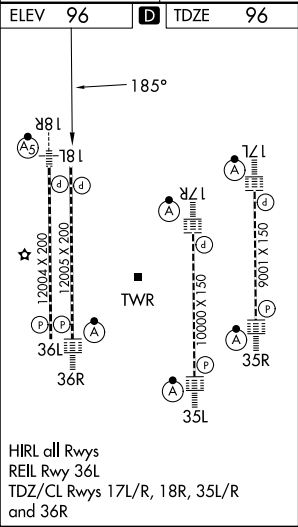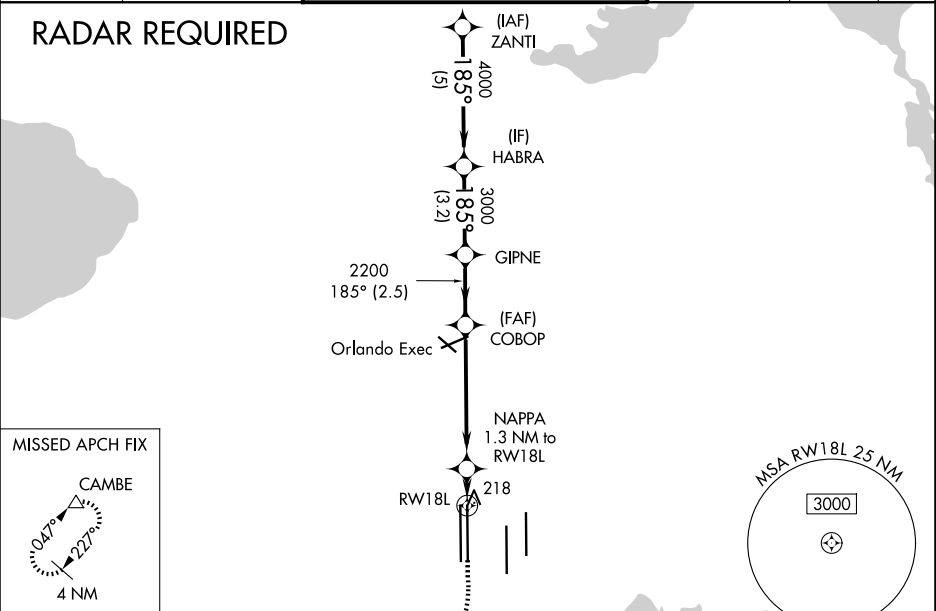

ELEV 96	D	TDZE 96
HIRL all Rwys REIL Rwy 36L TDZ/CL Rwys 17L/R, 18R, 35L/R and 36R		
ORLANDO, FLORIDA Amdt 1 05FEB15		
28°26'N-81°19'W		
RNAV (GPS) RWY 18L		