

WAAS CH 69512 W18A	APP CRS 182°	Rwy Idg 4935 TDZE 27 Apt Elev 28
--	------------------------	---

RNAV (GPS) RWY 18

GULFPORT-BILOXI INTL (GPT)

RNP APCH - GPS.




A
ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct RUDAW and hold.

ATIS 119.45	GULFPORT APP CON ★ 127.5 254.25	GULFPORT TOWER ★ 123.7 (CTAF) 0 339.8	GND CON 120.4 348.6	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

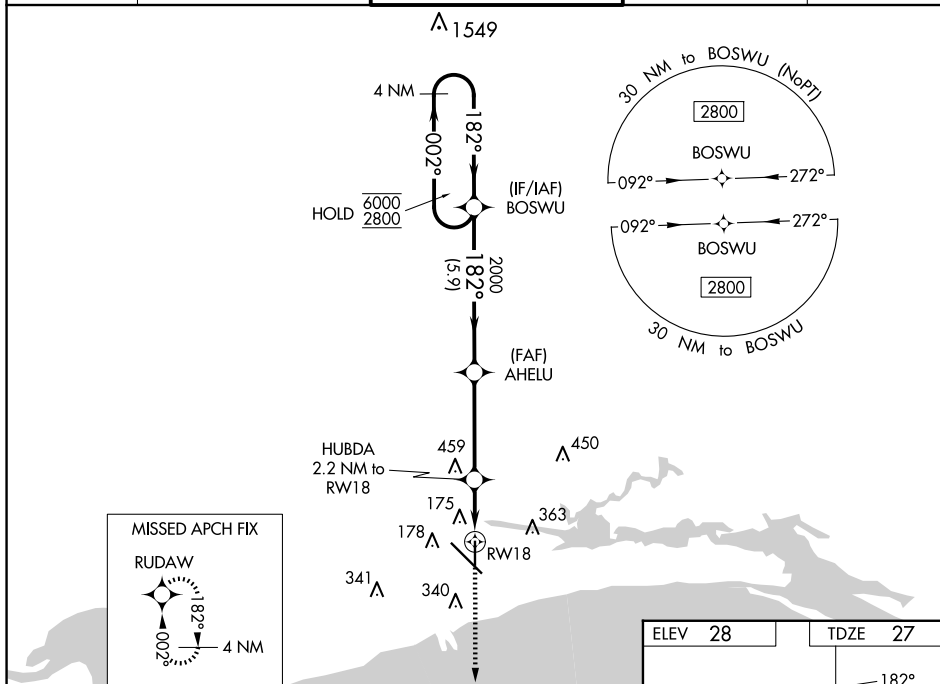

4 NM Holding Pattern

BOSWU

AHELU

HUBDA 2.2 NM to RW18

2000

2000

182°

182°

1.2 NM to RW18

RW18

GP 3.00° TCH 50

5.9 NM

3.8 NM

1.1 NM

1.2 NM

2000

780

CATEGORY	A	B	C	D
LPV DA	227- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	442-1 $\frac{1}{8}$ 415 (500-1 $\frac{1}{8}$)			
LNAV MDA	440-1 413 (500-1)		440-1 $\frac{1}{8}$ 413 (500-1 $\frac{1}{8}$)	
C CIRCLING	520-1 492 (500-1)	640-1 612 (700-1)	760-2 732 (800-2)	760-2 $\frac{1}{4}$ 732 (800-2 $\frac{1}{4}$)

