

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>82109</b><br><b>W05A</b> | APP CRS<br><b>049°</b> | Rwy Idg <b>9020</b><br>TDZE <b>573</b><br>Apt Elev <b>589</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 5

TERRE HAUTE RGNL (HUF')

RNP APCH.

▼

⚠



ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. VDP and Baro-VNAV NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet, and all MDA 80 feet. Increase LPV all Cats visibility ¼ SM and Circling Cat C/D visibility ¼ SM. For inoperative ALS, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cat C/D visibility to RVR 6000, when using Paris altimeter setting, increase LPV and LNAV/VNAV visibility all Cats to RVR 6000, increase LNAV Cat C/D visibility to 1 ¾ SM.


MALSR

MISSED APPROACH:  
Climb to 2400 direct  
IPEDY and hold.

|                              |                                       |                                        |                               |
|------------------------------|---------------------------------------|----------------------------------------|-------------------------------|
| ATIS<br><b>127.5 269.375</b> | HULMAN APP CON<br><b>125.45 339.8</b> | HULMAN TOWER<br><b>134.725 322.475</b> | GND CON<br><b>121.6 348.6</b> |
|------------------------------|---------------------------------------|----------------------------------------|-------------------------------|

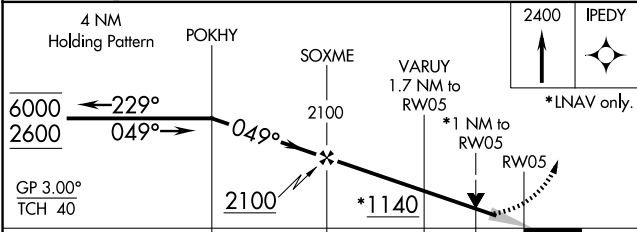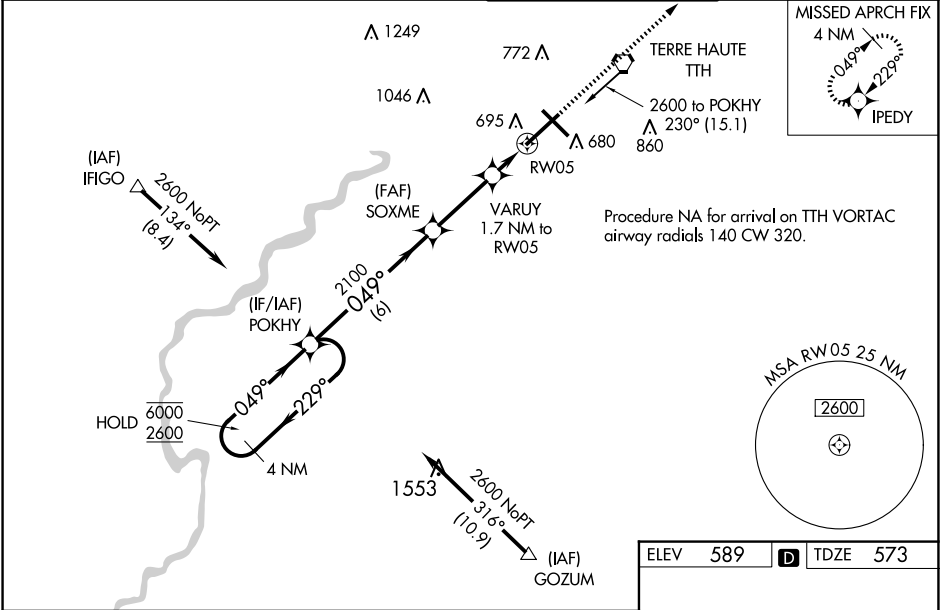

| CATEGORY      | A      | B           | C                        | D                      |
|---------------|--------|-------------|--------------------------|------------------------|
| LPV DA        |        | 875/24      | 302 (300-½)              |                        |
| LNAV/ VNAV DA |        | 924/40      | 351 (400-¾)              |                        |
| LNAV MDA      |        | 960/50      | 387 (400-1)              |                        |
| CIRCLING      | 1040-1 | 451 (500-1) | 1 220-1¾<br>631 (700-1¾) | 1 220-2<br>631 (700-2) |

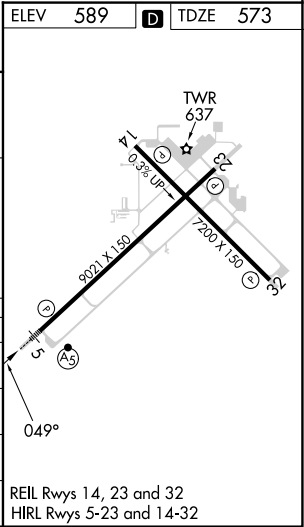

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025