

WAAS CH 49006 W29A	APP CRS 287°	Rwy Ldg TDZE Apt Elev 9800 2 4
--	------------------------	--

RNAV (GPS) Y RWY 29

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV Cat C/D visibility to 1⅓ mile.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct LETSE and on track 291° to RQR VOR/DME and hold.

D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC
-------------------------	---	---	---------------------------------	----------------------------	-------

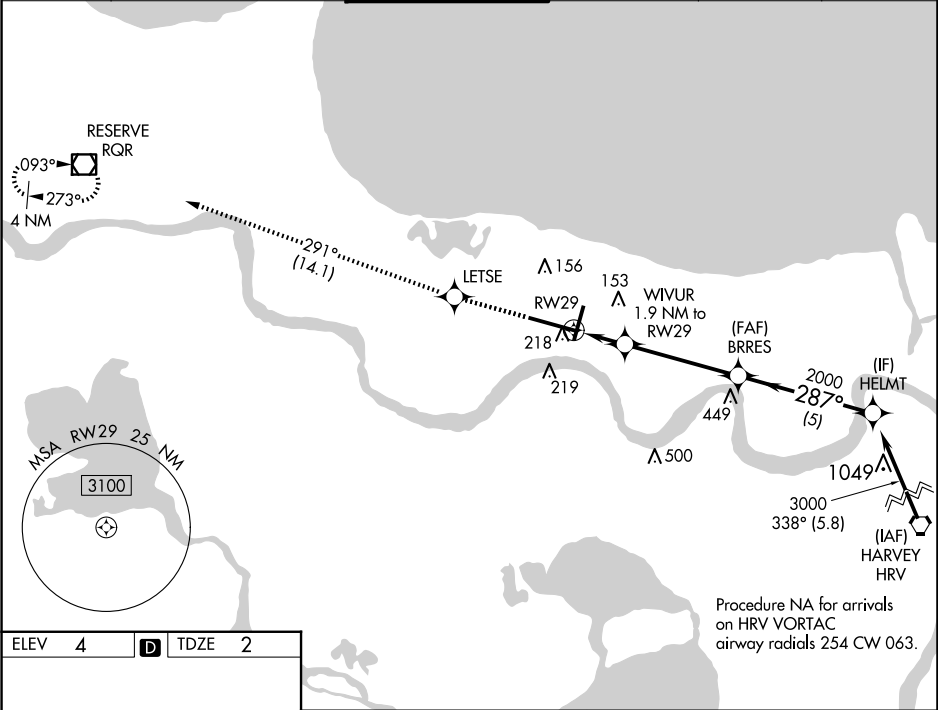

ELEV 4

D

TDZE 2

NEW ORLEANS, LOUISIANA
Amdt 4A 17AUG17

3000

LETSE

tr 291°

RQR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

*LNAV only.

WIVUR 1.9 NM to RWY29

*1.3 NM to RWY29

RWY29

BRRES 2000

HELMT 3000

287°

2000

GP 3.00° TCH 53

CATEGORY	A	B	C	D
LPV DA**	202/24	200 (200-½)		
LNAV/VNAV DA	380/40	378 (400-¾)		
LNAV MDA	480/24	478 (500-½)	480/50	478 (500-1)
C CIRCLING	520-1	516 (600-1)	580-1½ 576 (600-1½)	600-2 596 (600-2)