

NORTH BAY VISUAL RWY 18

AL-625 (FAA)

ST PETE-CLEARWATER INTL (PIE)
ST PETERSBURG-CLEARWATER, FLORIDA

ATIS
134.5
TAMPA APP CON
125.3 316.05
ST PETERSBURG-CLEARWATER TOWER ★
118.3 (CTAF) 257.8
GND CON
121.9 348.6
CLNC DEL
120.6 350.2
UNICOM
122.95


RADAR REQUIRED

PROCEDURE NOT AUTHORIZED AT NIGHT
NOT AUTHORIZED WHEN TOWER NOT IN OPERATION
Weather Minimums: 2100 feet ceiling
and 3 miles visibility.

GULF OF AMERICA

LAKE
TARPON

Vertical Guidance Navaid and Angle
I-PIE 3.00°
PAPI Rwy 18 3.00°

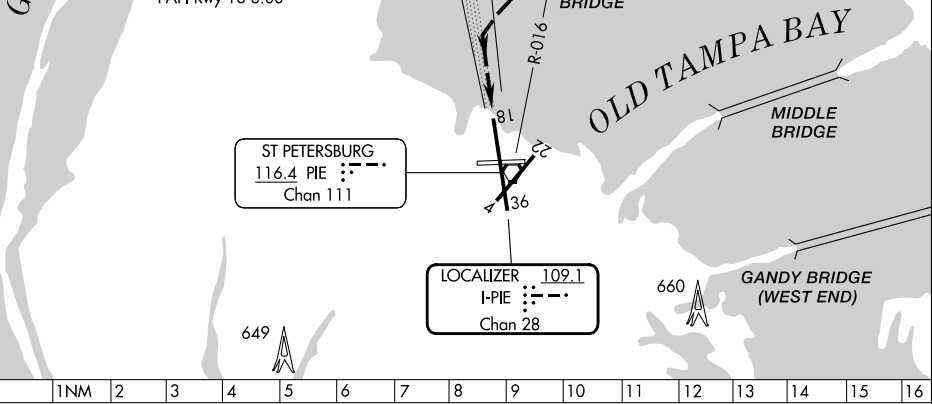

NORTH BAY VISUAL APPROACH

When cleared for a NORTH BAY VISUAL APPROACH, aircraft will proceed visually from over the power station (PIE R-016, 6 DME) heading 196° direct to the Causeway Bridge, then right turn to intercept the final approach course to Rwy 18.

NORTH BAY VISUAL RWY 18

Amdt 6 29MAR18

27°55'N-82°41'W

ST PETERSBURG-CLEARWATER, FLORIDA
ST PETE-CLEARWATER INTL (PIE)