


WAAS CH 93701 W05A	APP CRS 045°	Rwy Ldg TDZE Apt Elev 6500 411 411
--	------------------------	--

RNAV (GPS) RWY 5

BARKLEY RGNL (PAH)

RNP APCH.	MALSR 	MISSED APPROACH: Climb to 3000 direct HILAM and hold.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.  For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		

ASOS 118.375	MEMPHIS CENTER 133.65 292.15	PADUCAH TOWER★ 119.6 (CTAF) 306.9	GND CON 121.7 306.9	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

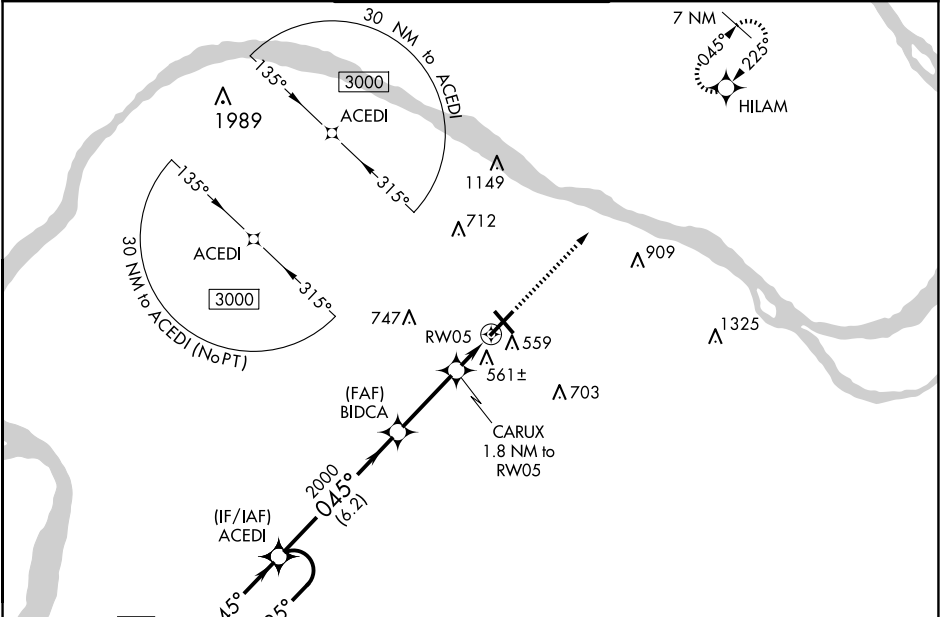

ELEV 411

D

TDZE 411

7 NM Holding Pattern

6000

3000

GP 3.00° TCH 50

ACEDI

BIDCA

CARUX 1.8 NM to RW05

RW05

3000 HILAM

*1020

*1.1 NM to RW05

*1.1 NM

6.2 NM

3 NM

0.7

1.1 NM

CATEGORY	A	B	C	D
LPV DA	611-½ 200 (200-½)			
LNAV/DA VNAV	837-¾ 426 (500-¾)			
LNAV MDA	820-½ 409 (500-½)		820-¾ 409 (500-¾)	
 CIRCLING	900-1 489 (500-1)		920-1½ 509 (600-1½) 1100-2¼ 689 (700-2¼)	

HIL Rwy 5-23

MIRL Rwy 14-32

REIL Rwy 23 and 32