

WAAS CH 56331 W04A	APP CRS 043°	Rwy Idg TDZE Apt Elev	8748 37 40
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 4

Wallops Flight Facility (WAL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 342 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 510 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON ★ 127.95 314.0	Wallops Tower ★ 126.5 (CTAF) 0 306.975 (CTAF) 0	GND CON 127.875 269.325	CLNC DEL 121.7
------------------------	---	---	-----------------------------------	--------------------------

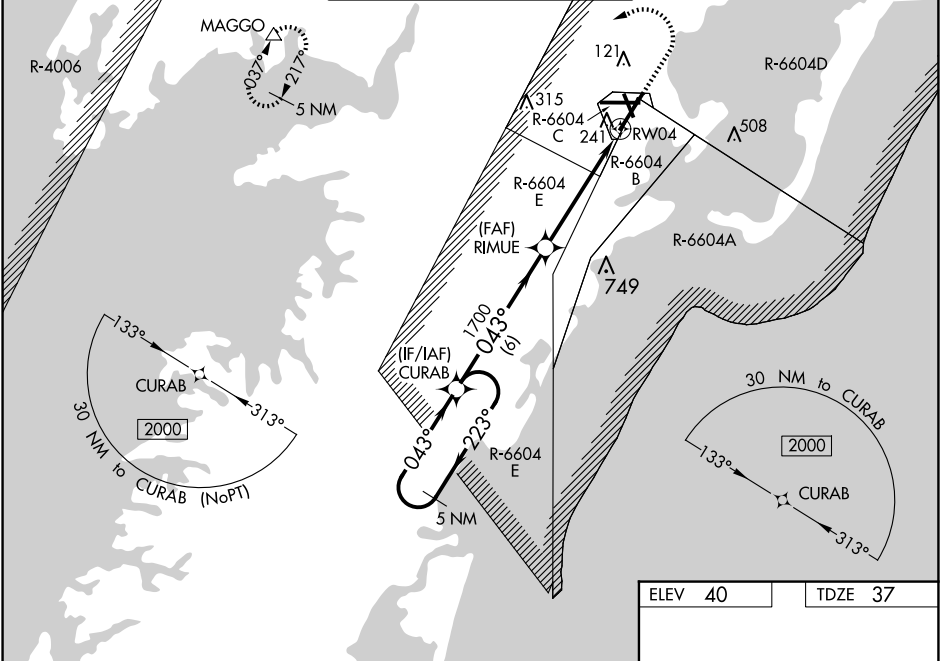

5 NM Holding Pattern CURAB

2000 ← 223° → 043° → 043° → 1700 → 1700 → RW04

GP 3.00° TCH 57

6 NM 3.6 NM 1.5 NM

600 2000 MAGGO

* 1.5 NM to RW04

* LNAV only.

CATEGORY	A	B	C	D
LPV DA		287-¾	250 (300-¾)	
LNAV/VNAV DA		455-1⅜	418 (500-1⅜)	
LNAV MDA	560-1	523 (600-1)	560-1½	523 (600-1½)
CIRCLING	600-1	560 (600-1)	620-1½ 580 (600-1½)	860-2¾ 820 (900-2¾)

