

WAAS CH 97623 W15A	APP CRS 151°	Rwy ldg 4500 TDZE 45 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 15

NANTUCKET MEML (ACK)


RNP APCH.

▼

Baro-VNAV NA when using Hyannis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 15 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 358, LNAV/VNAV DA to 543, and all MDA 80 feet; increase LNAV/VNAV all Cats and LNAV Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2300 direct DUPKE and hold.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------	----------------------------	-------------------------

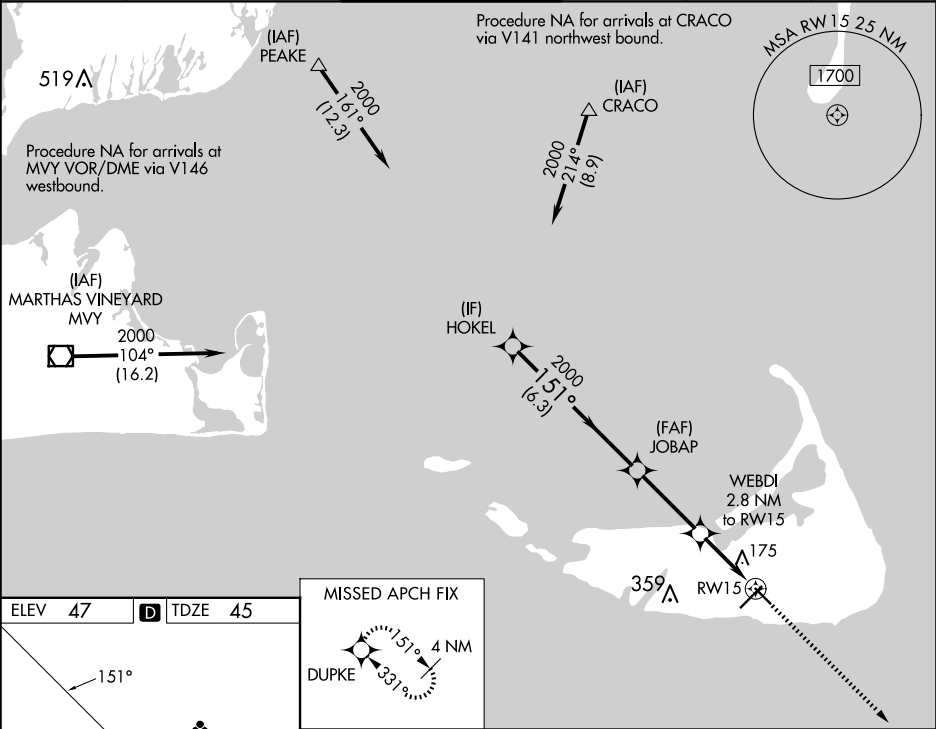

ELEV 47	D	TDZE 45	MISSED APCH FIX				2300	DUPKE
			HOKEL				*LNAV only.	
			JOBAP				*980	
			WEBDI 2.8 NM to RW15				RW15	
			RW15					
CATEGORY			A		B		C	
LPV DA			295-1		250 (300-1)			
LNAV/VNAV DA			480-1½		435 (500-1½)			
LNAV MDA			440-1 395 (400-1)		440-1⅛ 395 (400-1⅛)			