

WAAS CH 63002 W22A	APP CRS 219°	Rwy Idg 6153 TDZE 17 Apt Elev 18
--	------------------------	---

RNAV (GPS) RWY 22

COASTAL CAROLINA RGNL (E'W'N)

RNP APCH.



▼

⚠

Rwy 14, 32 helicopter visibility reduction below 1 SM NA. Rwy 22 helicopter visibility reduction below ¾ SM NA. Circling Rwy 14, 32 NA at night. Baro-VNAV NA when using Cherry Point altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Cherry Point altimeter setting; increase all DA 32 feet and all MDA 40 feet. Increase LPV and LNAV/VNAV visibility ½ SM, and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct ZUPER and on track 271° to BEULA and hold.

ASOS 118.525	CHERRY POINT APP CON 119.35 374.9	NEW BERN TOWER ★ 124.25 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 120.525 (when twr closed)
------------------------	---	---	-------------------------	--------------------------	---

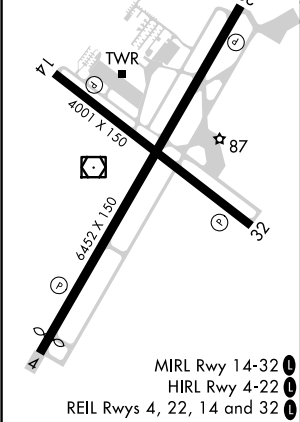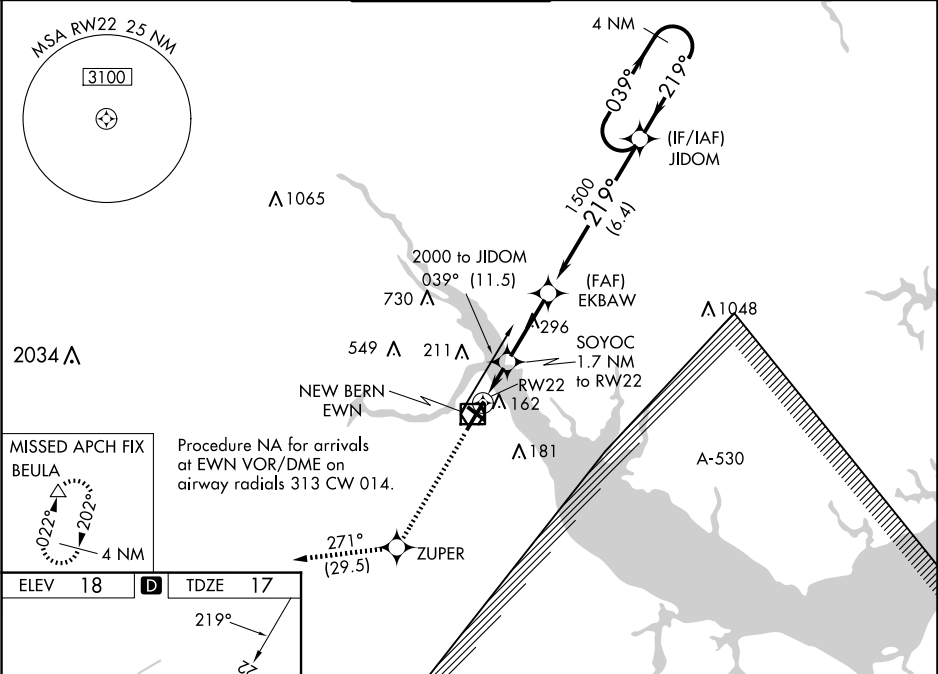

ELEV 18	D	TDZE 17
3000	ZUPER	tr 271°
BEULA	△	
*LNAV only.	SOYOC 1.7 NM to RW22	EKBAW 1500
RW22	*580	1500
1.7 NM	2.9 NM	6.4 NM
CATEGORY	A	B
LPV DA	269-7/8	252 (300-7/8)
LNAV/VNAV DA	376-1 1/4	359 (400-1 1/4)
LNAV MDA	480-1 463 (500-1)	480-1 3/8 463 (500-1 3/8)
CIRCLING	480-1 462 (500-1)	520-1 502 (600-1)
	600-1 1/2 582 (600-1 1/2)	860-2 3/4 842 (900-2 3/4)