

RNAV (GPS) RWY 23

WAAS Chan 56203 W23A	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arpt Elev 571
--	-------------------------	--

[USA]

CAMPBELL AAF (FORT CAMPBELL) (KHOP)

RNP APCH - GPS



T * When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile.
 ** When ALS inop, increase RVR to 55, vis to 1 mile.
 *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile,
 CAT CDE RVR to 60, vis to $1\frac{1}{2}$ miles.
 **** Circling not authorized SE of Rwy 5-23.

SSALR


MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct CHNUK and hold.

ATIS		APP CON		TOWER		GND CON		CLNC DEL		ASR/PAR
125.175	308.4	118.1	269.525	120.9	278.8	121.8	266.8	138.8		

For uncompensated BARO-VNAV systems,
LNAV/VNAV NA below -19°C (-2°F) or
above 54°C (130°F).

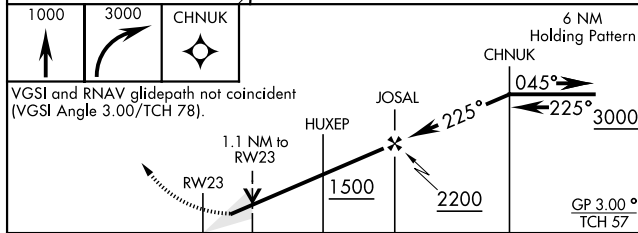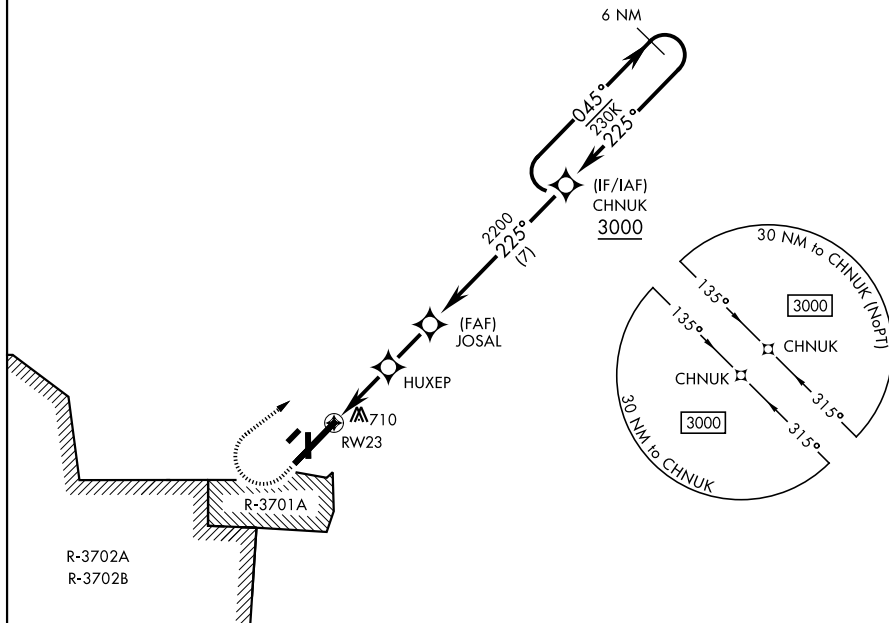

		← 2.8 NM →		← 2.1 NM →			
CATEGORY	A	B	C	D	E		
LPV DA *	771/24		200	(200-½)			
LNAP/DA ** VNAV	949/35		378	(400-⅝)			
LNAP MDA ***	960/24	389 (400-½)	960/35		389 (400-¾)		
**** C CIRCLING	1060-1	489 (500-1)	1060-1½ 489 (500-1½)	1140-2	569 (600-2)		

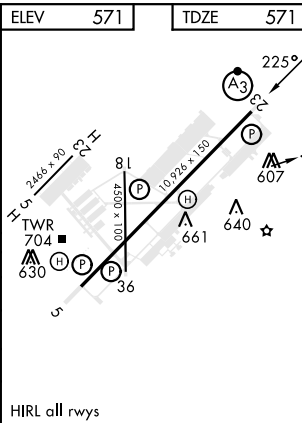

RNAV (GPS) RWY 23