
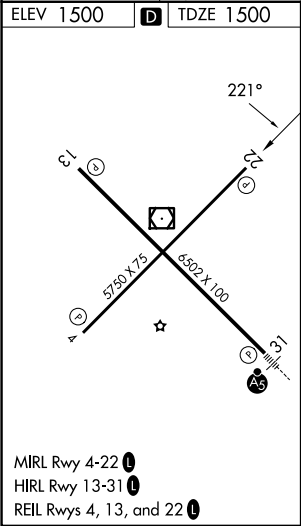



WAAS CH 70505 W22A	APP CRS 221°	Rwy Ldg TDZE 1500 Apt Elev 1500
--	------------------------	---

RNAV (GPS) RWY 22

JAMESTOWN RGNL (JMS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (5°F) or above 54°C (130°F). DME/DME RNP- 0.3 NA.		MISSED APPROACH: Climb to 3700 direct GANEY and hold.
ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0

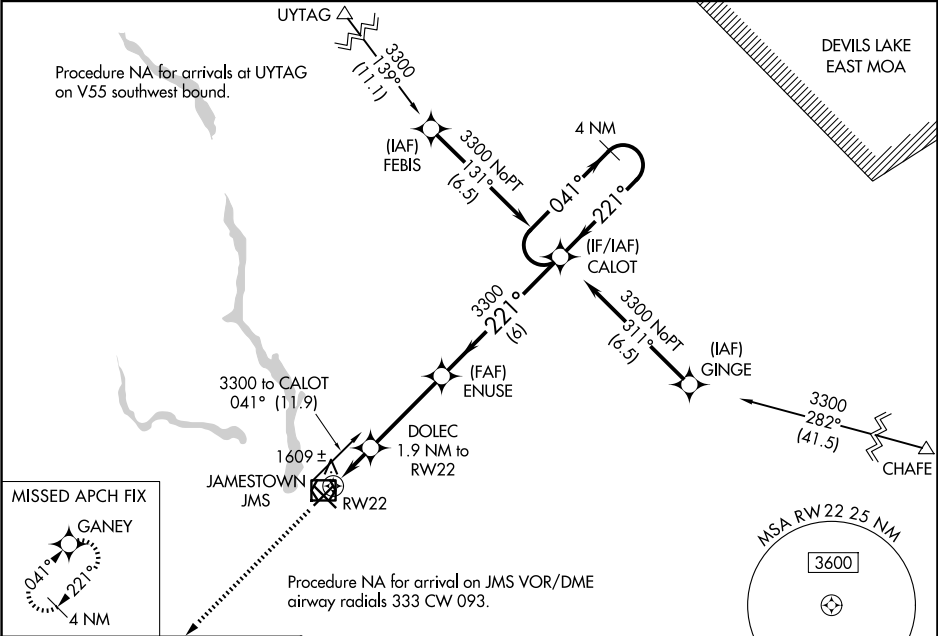

3700 ↑		GANEY 		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 21).			
*LNAV only		DOLEC 1.9 NM to RW22		ENUSE 3300		CALOT 4 NM Holding Pattern	
		*1.1 NM to RW22		221° 2140*		041° → 3300 ← 221° GP 3.00° TCH 45	
1.1 NM		0.9 NM		3.6 NM		6 NM	
CATEGORY	A		B		C		D
LPV DA			1750-3/4 250 (300-3/4)				
LNAV/ VNAV DA			1790-1 290 (300-1)				
LNAV MDA			1860-1 360 (400-1)				
CIRCLING	1960-1 460 (500-1)		2000-1 1/2 500 (500-1 1/2)		2300-2 1/2 800 (800-2 1/2)		