

|                                  |                        |                             |                                           |
|----------------------------------|------------------------|-----------------------------|-------------------------------------------|
| LOC I-RIW<br><b><u>110.5</u></b> | APP CRS<br><b>284°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8204</b><br><b>5459</b><br><b>5516</b> |
|----------------------------------|------------------------|-----------------------------|-------------------------------------------|

ILS or LOC RWY 28  
CENTRAL WYOMING RGNL (RIW)


**T** When local altimeter setting not received, use Lander altimeter setting: increase  
**A** NA DA to 5713 feet; increase all MDA 60 feet and S-LOC 28 Cat C and D visibility  
 ¼ mile. For Inop MALSR, when using Lander altimeter setting, increase S-ILS 28  
 all Cts visibility to ¾ mile and S-LOC 28 Cat C and D visibility to 1¾ mile.  
 VDP NA when using Lander altimeter setting.

MALSR



**MISSED APPROACH:** Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold, continue climb-in-hold to 7700.

|                        |                                         |                                 |
|------------------------|-----------------------------------------|---------------------------------|
| ASOS<br><b>121.425</b> | SALT LAKE CENTER<br><b>133.25 285.6</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|------------------------|-----------------------------------------|---------------------------------|

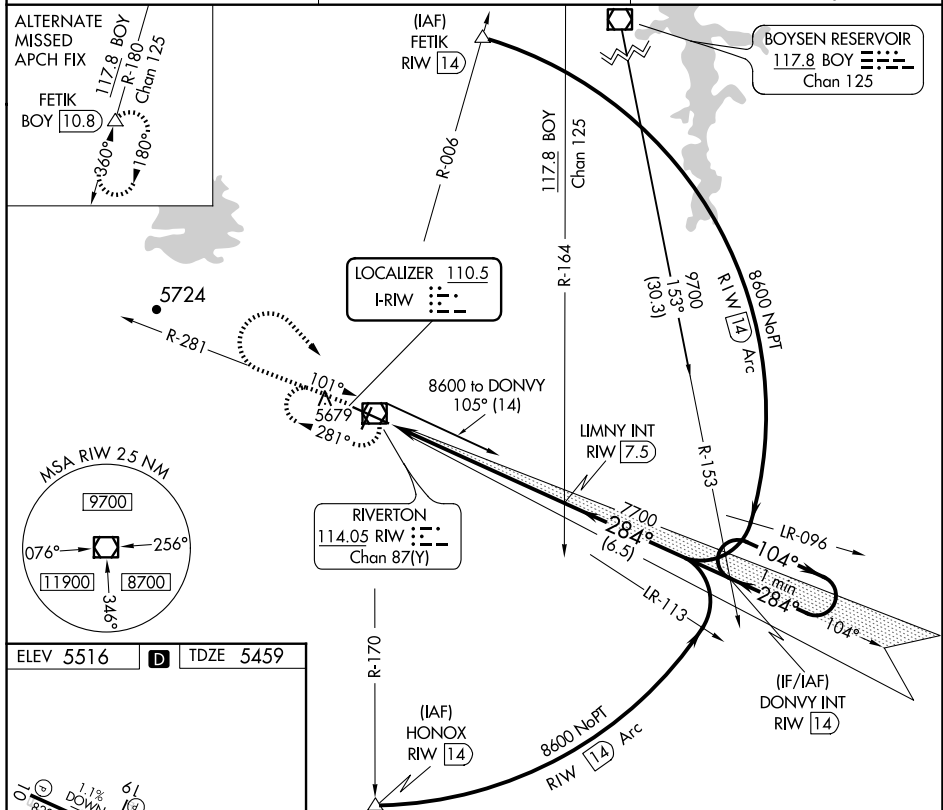

REIL Rws 1, 10 and 19  
MIRL Rwy 1-19  
HIRL Rwy 10-28

FAF to MAP 6.9 NM

| Knots   | 60   | 90   | 120  | 150  | 180  |
|---------|------|------|------|------|------|
| Min:Sec | 6:54 | 4:36 | 3:27 | 2:46 | 2:18 |

**CIRCLING**

| CATEGORY        | A                  | B | C                                          | D |
|-----------------|--------------------|---|--------------------------------------------|---|
| S-ILS 28        | 5659-½ 200 (200-½) |   |                                            |   |
| S-LOC 28        | 5880-½ 421 (400-½) |   | 5880-¾ 421 (400-¾)                         |   |
| <b>CIRCLING</b> | 6000-1 484 (500-1) |   | 6000-1½ 484 (500-1½)<br>6120-2 604 (700-2) |   |

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025