


WAAS CH 42899 W10A	APP CRS 104°	Rwy Idg TDZE 5516 Apt Elev 5516	8204 5516 5516
--	------------------------	---	---

RNAV (GPS) RWY 10
CENTRAL WYOMING RGNL (RIW)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lander altimeter setting and increase all DA 54 feet and all MDA 60 feet, and increase LPV and LNAV/VNAV all Cats visibility ¼ mile and increase LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Lander altimeter setting. Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 48°C (118°F).

MISSED APPROACH: Climb to 8600 direct DONVY and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

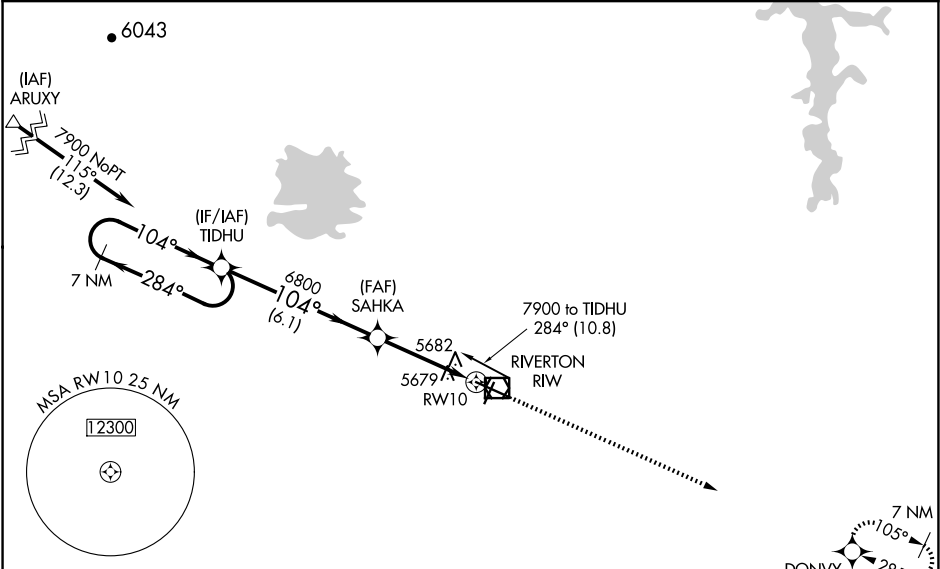

ELEV 5516 | **D** | TDZE 5516

104° to RW10

1.1% DOWN 61

0.8% UP 4800

0.7% UP 5513

AS 28

REIL Rwy 1, 10 and 19 **0**
MIRL Rwy 1-19 **0**
HIRL Rwy 10-28 **0**

7 NM Holding Pattern				8600	DONVY
7900 ← 284° 104° →				*LNAV only.	
GP 3.00° TCH 50				*1.2 NM to RW10	
6800				RW10	
6.1 NM				2.7 NM	1.2
CATEGORY	A	B	C	D	
LPV DA	5902-1¼		386 (400-1¼)		
LNAV/VNAV DA	5965-1½		449 (500-1½)		
LNAV MDA	5940-1	424 (500-1)	5940-1¼	424 (500-1¼)	
C CIRCLING	6000-1	484 (500-1)	6000-1½	484 (500-1½)	6120-2 604 (700-2)

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025