

RIVERTON, WYOMING

AL-691 (FAA)

23250

VOR/DME RIW 114.05 Chan 87(Y)	APP CRS 293°	Rwy Idg 8204 TDZE 5459 Apt Elev 5516
---	------------------------	---

VOR RWY 28
CENTRAL WYOMING RGNL (RIW)

T When local altimeter setting not received, use Lander altimeter setting and increase all MDA 60 feet. VDP NA when using Lander altimeter setting.


A For inop MALSR, increase S-28 Cat C and D visibility to 1½ miles.

MALSR


MISSED APPROACH: Climb to 7700 in RIW VOR/DME holding pattern.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------


• 6043



RIVERTON
114.05 RIW ::
Chan 87(Y)

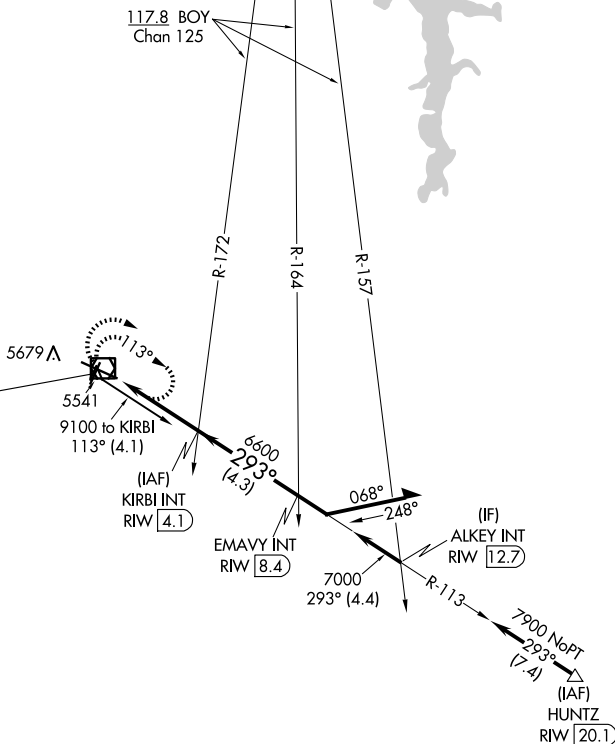

ELEV 5516	D	TDZE 5459
-----------	----------	-----------



REIL Rwy 1, 10 and 19 **L**
MIRL Rwy 1-19 **L**
HIRL Rwy 10-28 **L**

CATEGORY	A	B	C	D
S-28	5920-½ 461 (500-½)		5920-1	461 (500-1)
C CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)	6120-2 604 (700-2)

RIVERTON, WYOMING
Amdt 10B 07SEP23

CENTRAL WYOMING RGNL (RIW)
VOR RWY 28

43°04'N-108°28'W

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025