


APP CRS	Rwy Idg	7614
306°	TDZE	57
	Apt Elev	62

RNAV (RNP) Z RWY 30L

NORMAN Y MINETA SAN JOSE INTL (SJC)

RNP AR APCH.				MALSR	MISSED APPROACH: Climb to 2000 on track 306° to ARTAQ and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 all Cats visibility to RVR 5500 and increase RNP 0.30 all Cats visibility to 1½ SM.				AS		
D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) 257.6	121.7	118.0		122.95

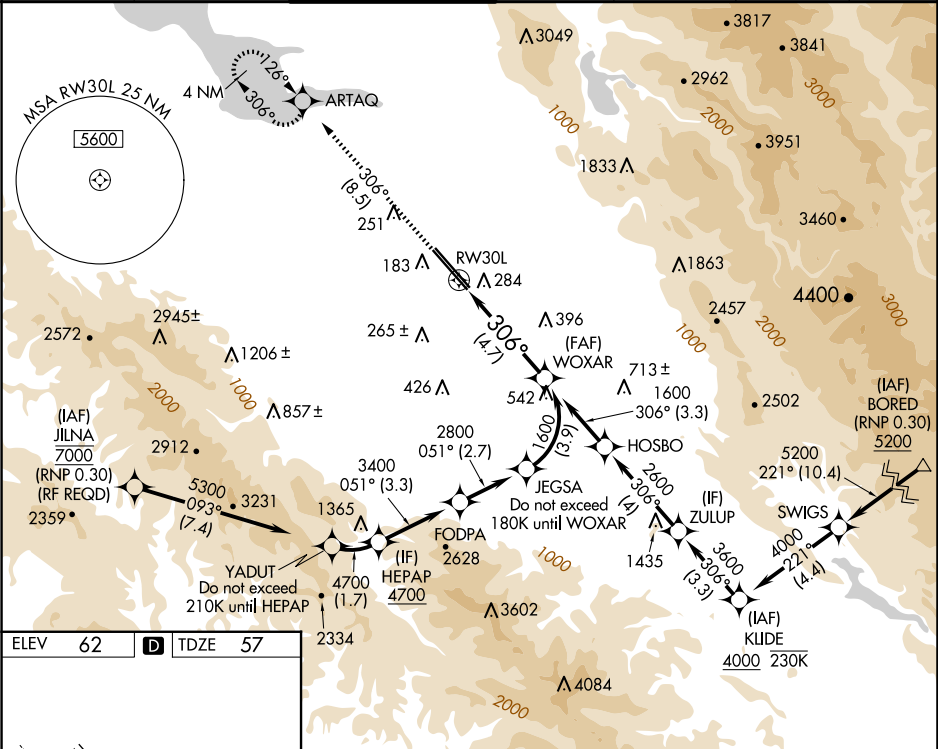

2000
↑
tr 306°

ARTAQ

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 70).

WOXAR
1600

See planview for multiple IF locations.

RW30L
306°
1600
GP 3.00°
TCH 54

CATEGORY
A
B
C
D

RNP 0.10 DA
430/35
373 (400-½%)

RNP 0.20 DA
464/40
407 (500-¾%)

RNP 0.30 DA
541/50
484 (500-1)

AUTHORIZATION REQUIRED