

WAAS CH 93738 W24A	APP CRS 240°	Rwy Idg TDZE 682 Apt Elev 682
--	------------------------	---


RNAV (GPS) RWY 24
DECATUR (DEC)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
Baro-VNAV and VDP NA when using Logan County altimeter setting.
When local altimeter setting not received, use Logan County altimeter setting; increase LPV DA to 1012 feet and visibility all Cats ¼ mile, LNAV/VNAV DA to 1168 feet and visibility all Cats ¼ mile; increase all MDA 80 feet and LNAV visibility Cats C/D ¾ mile, Circling visibility Cats C/D ¼ mile.

MISSED APPROACH:
Climb to 2300 direct FIKDO and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

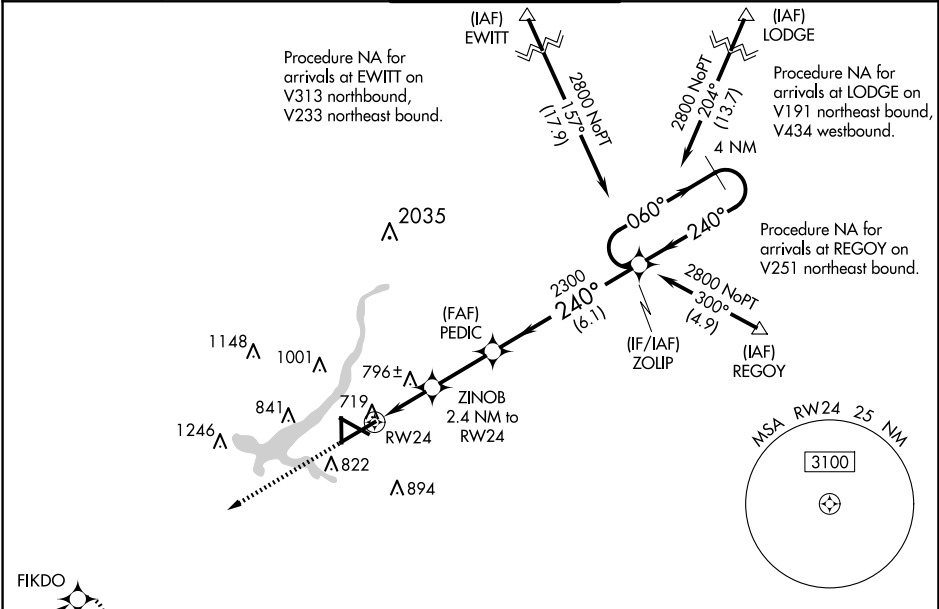

ELEV 682	TDZE 682
2300	FIKDO
*LNAV only.	
RW24	
*1 NM to RW24	
*1.500	
1 NM	1.4 NM
2.5 NM	6.1 NM
ZINOB 2.4 NM to RW24	
PEDIC 2300	
ZOLIP 4 NM	
Holding Pattern	
060°	2800
240°	
GP 3.00°	TCH 52
CATEGORY	A B C D
LPV DA	932-3/4 250 (300-3/4)
LNAV/VNAV DA	1088-13/8 406 (500-13/8)
LNAV MDA	1060-1 378 (400-1)
CIRCLING	1140-1 458 (500-1) 1240-1 558 (600-1) 1360-2 678 (700-2) 1360-2 1/4 678 (700-2 1/4)

