


WAAS CH 45738 W36A	APP CRS 360°	Rwy Idg TDZE Apt Elev	5298 678 682
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

DECATUR (DEC)

RNP APCH		DECATUR TOWER*		GND CON	UNICOM
Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C/D and Circling Cat C/D visibility ¾ SM.		MISSED APPROACH: Climb to 3100 direct HEPAX and hold.			
ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	118.9(CTAF) 0 291.775		121.75 291.775	122.95

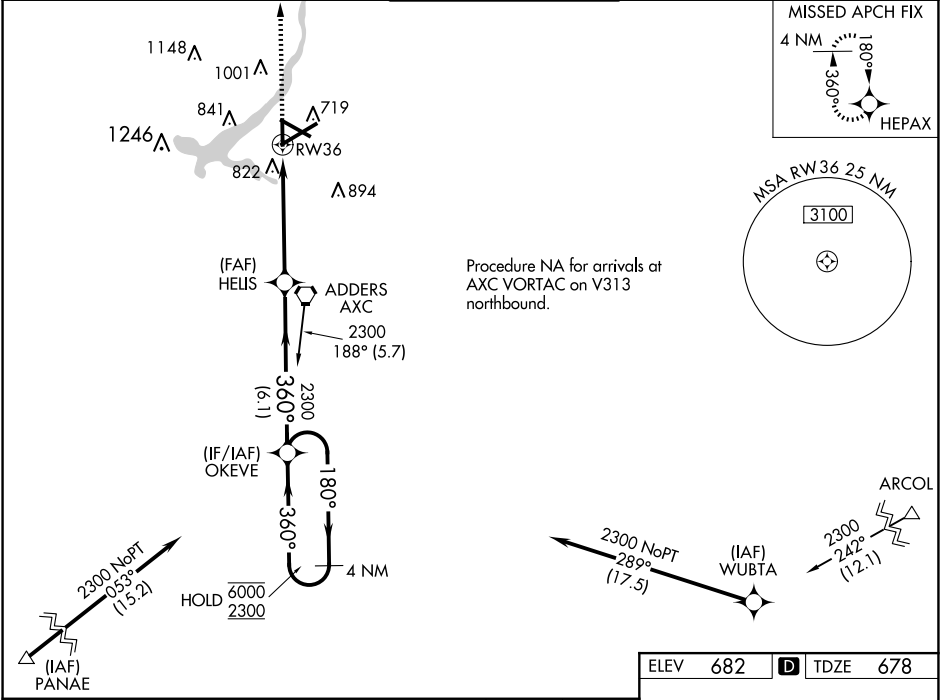

4 NM Holding Pattern		OKEVE	HELIS	3100	HEPAX
6000 ← 180°		360° →	2300	*LNAV only	
GP 3.00°		360° →	2300	*1.4 NM to RW36	
TCH 58		360° →	2300	RW36	
		6.1 NM	3.5 NM	1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	984-7/8		306 (400-7/8)		
LNAV/VNAV DA	1082-1 1/8		404 (400-1 1/8)		
LNAV MDA	1180-1		502 (500-1)		
CIRCLING	1180-1		1360-2		
	498 (500-1)		678 (700-2)		
CIRCLING	1240-1		1360-2 1/4		
	558 (600-1)		678 (700-2 1/4)		

