

LOC I-OKK	APP CRS	Rwy Idg	6001
108.9	230°	TDZE	827
		Apt Elev	832

ILS or LOC RWY 23

KOKOMO MUNI (OKK)

RADAR required for procedure entry.

▼


▲NA

For inop ALS, increase S-LOC 23 Cat C/D visibility to 1½ SM.
* DME from OKK


MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2600 direct MZZ VOR/DME and hold.

AWOS-3PT	GRISSEM APP CON*	CLNC DEL	UNICOM
128.675	121.05 338.275	120.0	123.0 (CTAF) 0

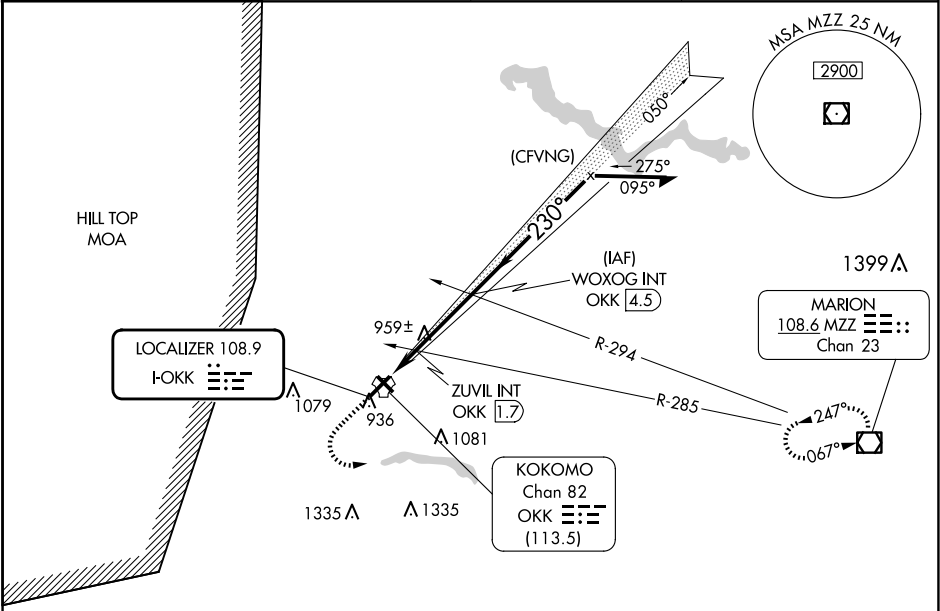

ELEV 832	TDZE 827
----------	----------

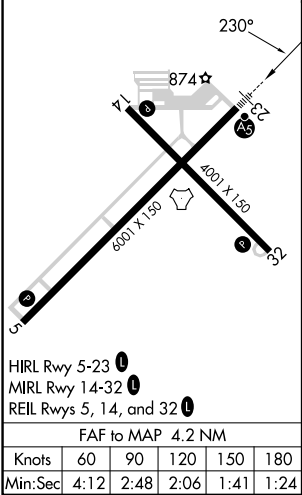

	1400	2600	MZZ	
			ZUVIL INT OKK 1.7	
			WOXOG INT OKK 4.5	
			2200	
			230°	
			2400	
			2200	
			GS 3.00°	
			TCH 44	
			1.4 NM	
			2.8 NM	
CATEGORY	A	B	C	D
S-ILS 23	1027-½ 200 (200-½)			
S-LOC 23	1300-½ 473 (500-½)		1300-1 473 (500-1)	
CIRCLING	1300-1 468 (500-1)		1400-1½ 568 (600-1½) 1420-2 588 (600-2)	
ZUVIL FIX MINIMUMS* (DUAL VOR RECEIVERS or DME REQUIRED)				
S-LOC 23	1220-½ 393 (400-½)		1220-¾ 393 (400-¾)	
CIRCLING	1260-1 428 (500-1) 1300-1 468 (500-1)		1400-1½ 568 (600-1½) 1420-2 588 (600-2)	