

WAAS CH 45548	APP CRS 247°	Rwy Idg TDZE 682 Apt Elev 690
-------------------------	------------------------	---

RNAV (GPS) RWY 25
ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 25 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using PZQ altimeter setting. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1018 feet; increase LNAV/VNAV DA to 1115 feet and all visibilities 1/4 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
GRYDR and hold.

ATIS ★ 120.675 327.05	ALPENA APP CON ★ 128.425 379.3	ALPENA TOWER ★ 121.35 (CTAF) 0 318.1	GND CON 121.9 275.8	UNICOM 122.95
---------------------------------	--	--	-------------------------------	-------------------------

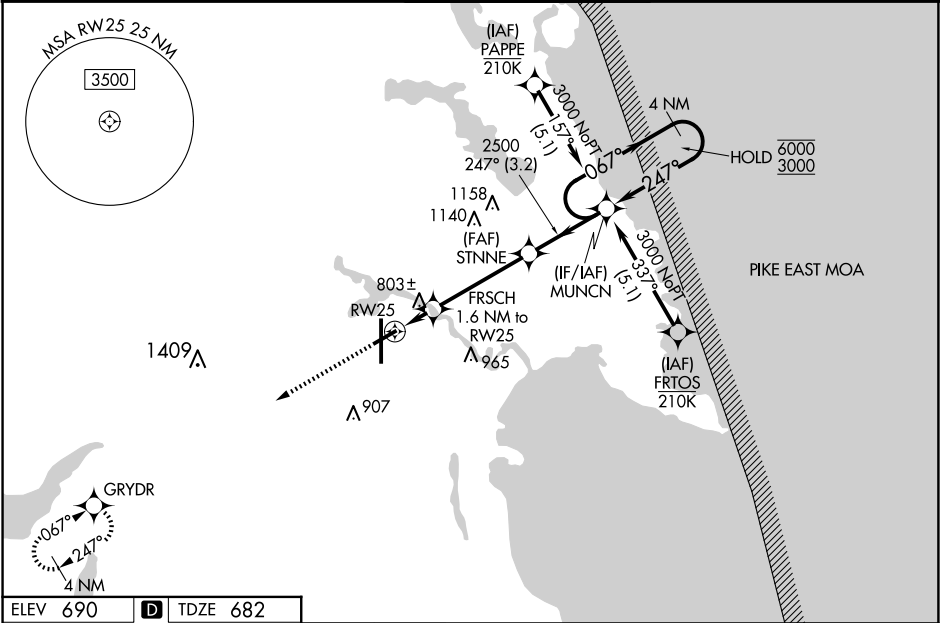

ELEV 690

D

TDZE 682

3000

GRYDR

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 48).

61

247°

TWR 768

5028 X 100

9000 X 150

A5

1 NM to RWY 25

1.6 NM to RWY 25

FRSCH

2500

STNNE

MUNCN

4 NM Holding Pattern

067°

247°

6000

3000

GP 3.00°

TCH 56

CATEGORY	A	B	C	D
LPV DA		963-1	281 (300-1)	
LNAV/VNAV DA		1060-1	378 (400-1)	
LNAV MDA		1060-1	378 (400-1)	
CIRCLING	1140-1	450 (500-1)	1220-1½ 530 (600-1½)	1300-2 610 (700-2)

EC-1, 04 SEP 2025 to 02 OCT 2025

EC-1, 04 SEP 2025 to 02 OCT 2025