

APP CRS
129°

Rwy Idg
TDZE
Apt Elev

4499
1723
1723


RNAV (GPS) RWY 13

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS.
Rwy 13 Straight-in/Circling and Circling to Rwy 31 NA at night. When local altimeter setting not received, use Dunkirk altimeter setting: increase all MDAs 200 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 4000 direct
GOSPL WP and hold.

AWOS-3PT 118.425	BUFFALO APP CON ★ 126.05	UNICOM 122.975 (CTAF) ①
----------------------------	------------------------------------	-----------------------------------

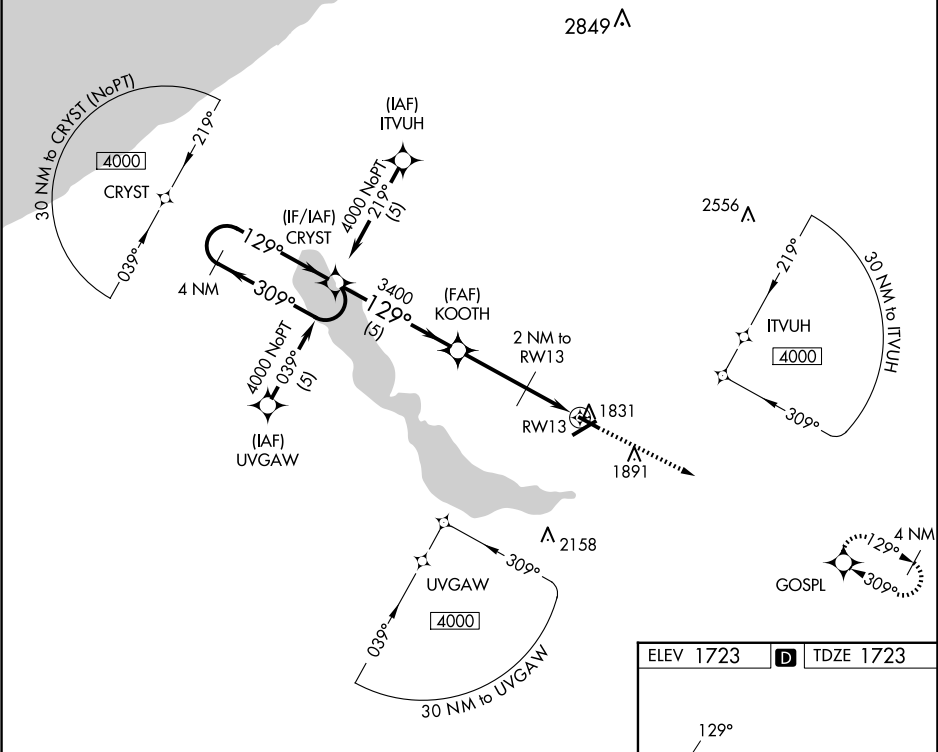

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 45).

4000

GOSPL

4 NM Holding Pattern

CRYST

4000

309°

129°

129°

KOOOTH

3400

3.06°

TCH 50

2400

2 NM to RW13

RW13

5 NM

3 NM

2 NM

CATEGORY	A	B	C	D
LNAV MDA	2140-1	417 (500-1)	2140-1¼	417 (500-1¼)
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)

ELEV 1723

D

TDZE 1723

129°

13

4499 X 100

1790

5300 X 100

13

0.4% UP

REIL Rwy 31 ①
MIRL Rwy 13-31 ①
HIRL Rwy 7-25 ①