

WAAS CH 58336 W28B	APP CRS 276°	Rwy Idg TDZE 65 Apt Elev 65
--	------------------------	---

RNAV (GPS) RWY 28L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

RNP APCH-GPS.

▼

▲

Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


MALSF

3

4

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct GEGEY and hold.

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
------------------------	---------------------------------------	---	-------------------------	--------------------------	-------

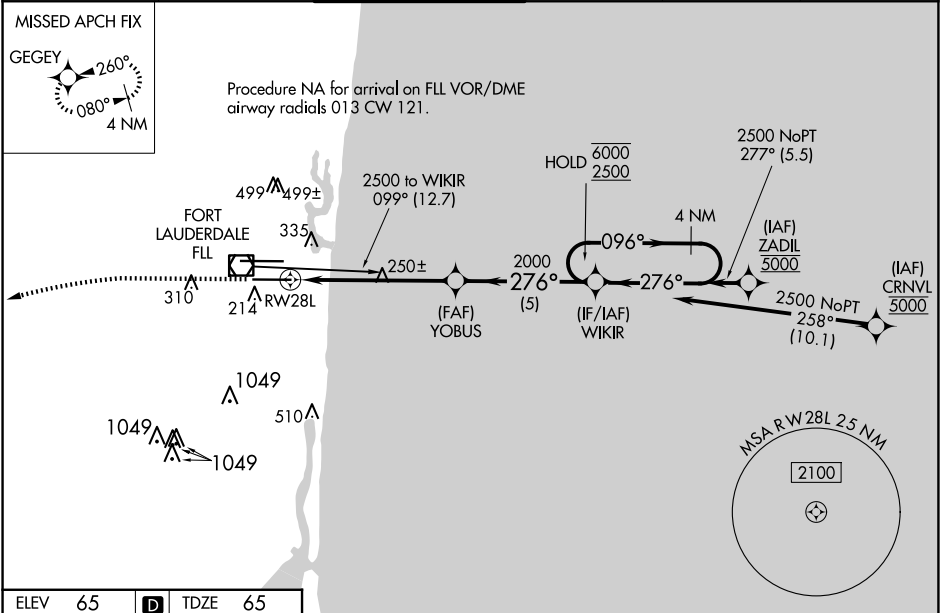

ELEV 65

D

TDZE 65

1000

3000

GEGEY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).

WIKIR

4 NM Holding Pattern

YOBUS

2000

1.2 NM to RW28L

1.2 NM

4.7 NM

5 NM

096°

276°

6000

2500

GP 3.00° TCH 53

101

66

28R

TWR 194

8000 X 150

8000 X 150

0.4% UP

1.0% DOWN

276°

HIRL Rwy 10L-28R and 10R-28L

CATEGORY	A	B	C	D
LPV DA	265/40		200 (200-¾)	
LNAV/VNAV DA	459/45		394 (400-⅞)	
LNAV MDA	500/40	435 (500-¾)	500/50	435 (500-1)
CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)