

LOC/DME I-CHO <u>111.7</u> Chan 54	APP CRS 030°	Rwy Idg 6801 TDZE 640 Apt Elev 640
--	------------------------	---

ILS or LOC RWY 3


T VDP NA when using Orange altimeter setting. When local altimeter setting not received, use Orange altimeter setting and increase S-ILS 3 DA to 911 and all MDA 80 feet;
A increase S-LOC 3 JTTV fix minimums Cats C/D, S-LOC 3 Cats C/D, and Circling Cats C/D, and JTTV fix minimums Circling Cats C/D visibility $\frac{1}{2}$ SM. For Inop ALS when using Orange altimeter setting, increase S-ILS 3 All Cats visibility to $\frac{7}{8}$ SM, S-LOC 3 Cats C/D visibility to 2 SM, and S-LOC 3 JTTV fix minimums Cats C/D visibility to $\frac{1}{2}$ SM.



MISSED APPROACH:
Climb to 2000 then
climbing right turn to
4000 direct GVE
VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 0 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	--	---------------------------------	-------------------------

ALTERNATE MISSED APCH FIX

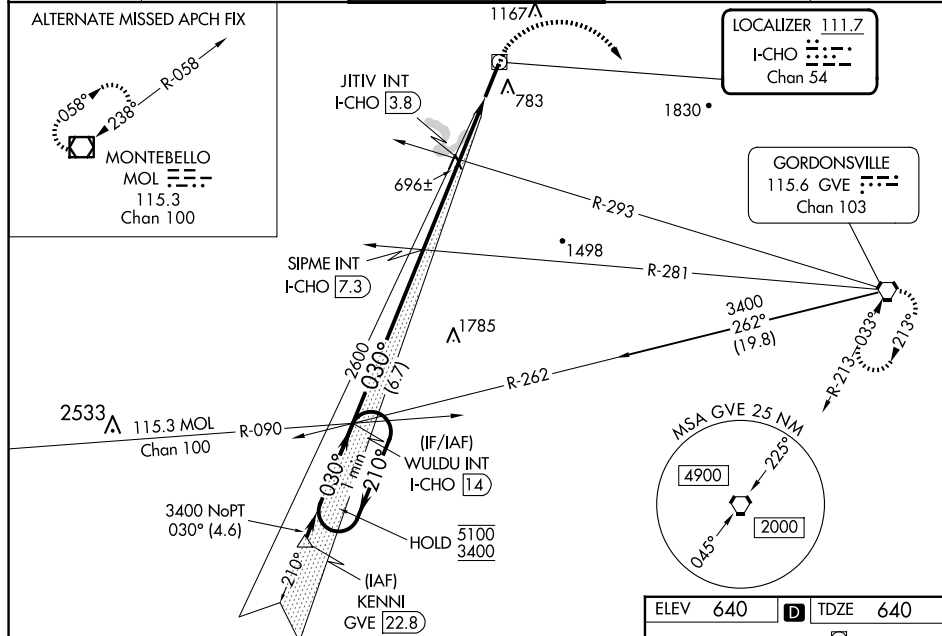

NE-3, 04 SEP 2025 to 02 OCT 2025

Diagram illustrating the Jitiv VOR/DME station layout and associated frequencies.

Station Information:

- VOR:** 113.7 MHz, 200° (200-1/2°)
- DME:** 113.1 MHz, 200 (200-1/2)

Distances:

- Distance from WULDU INT I-CHO (14) to Jitiv VOR: 6.7 NM
- Distance from Jitiv VOR to Jitiv DME: 1.6 NM
- Distance from Jitiv DME to the next station (113.1 MHz): 0.9 NM

Other Frequencies and Distances:

- WULDU INT I-CHO (14): 210°/030°
- SIPME INT I-CHO (7.3): 2600
- JITIV INT I-CHO (3.8): 2600
- I-CHO (2.2): 2600
- I-CHO (1.3): 2600

Diagram Labels:

- One Minute Holding Pattern
- GS 3.00° TCH 54
- *1360 when using Orange altimeter setting.
- 6.7 NM, 3.5 NM, 1.6 NM, 0.9 NM

