

ILS or LOC Y RWY 33

LOC I-MIZ 109.5	APCH CRS 325°	Rwy Idg 12,001
		TDZE 105
		Arprt Elev 113

- (USAF)

BEALE AFB (KBAB)


RADAR or DME required

▼ * When ALS inop, increase RVR to 40 and vis to 3/4 mile.
** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile;
CAT CDE RVR to 60 and vis to 1 1/8 miles.

ALSF-1

MISSED APPROACH: Climb to 3600 intercept
BAB TACAN R-326 to HAPAK and hold.

ATIS★ 124.55 273.5	NORCAL APP CON 125.4 259.1	TOWER★ 119.4 284.75	GND CON 121.6 257.75
-----------------------	-------------------------------	------------------------	-------------------------

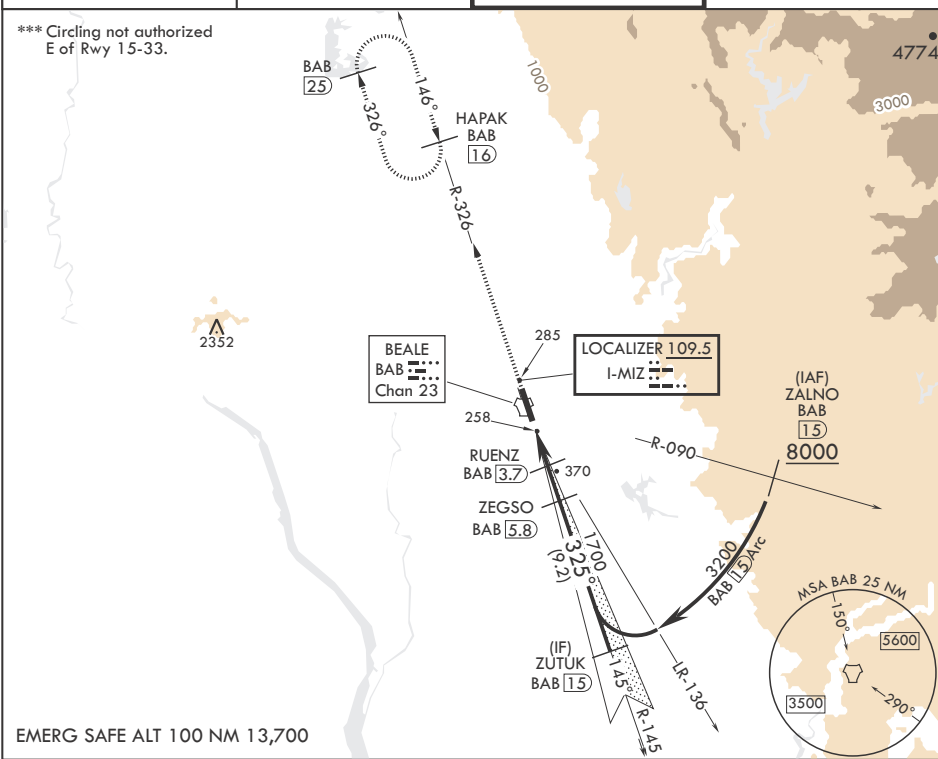

3600

BAB

R-326

HAPAK

BAB

16

3200

ZUTUK

BAB 15

ELEV 113

TDZE 105

BAB TACAN

ZAPUX

BAB 1.5

BAB 2.1

RUENZ

BAB 3.7

ZEGSO

BAB 5.8

0.5

2.2 NM

2.1 NM

1700

325°

GS 3.00°

TCH 50

CATEGORY	A	B	C	D	E
S-ILS 33*	305/24		200	(200-½)	
S-LOC 33**	520/24	415 (500-½)	520/40	415	(500-¾)
C CIRCLING***	600-1	487 (500-1)	600-1½ 487 (500-1½)	800-2¼ 687 (700-2¼)	800-2½ 687 (700-2½)

A1

31

P

1200 x 300

BCN 240

TWR 274

33

A1

325°

HIRL all Rwys