
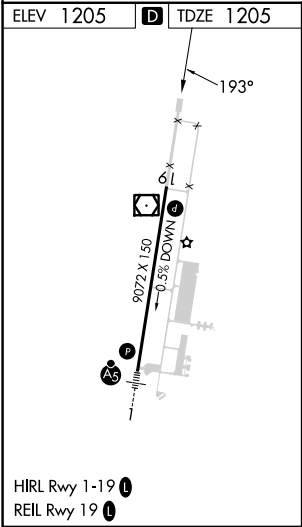



WAAS CH 86616 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	9072 1205 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19

MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3500 direct EVYIP and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.				
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

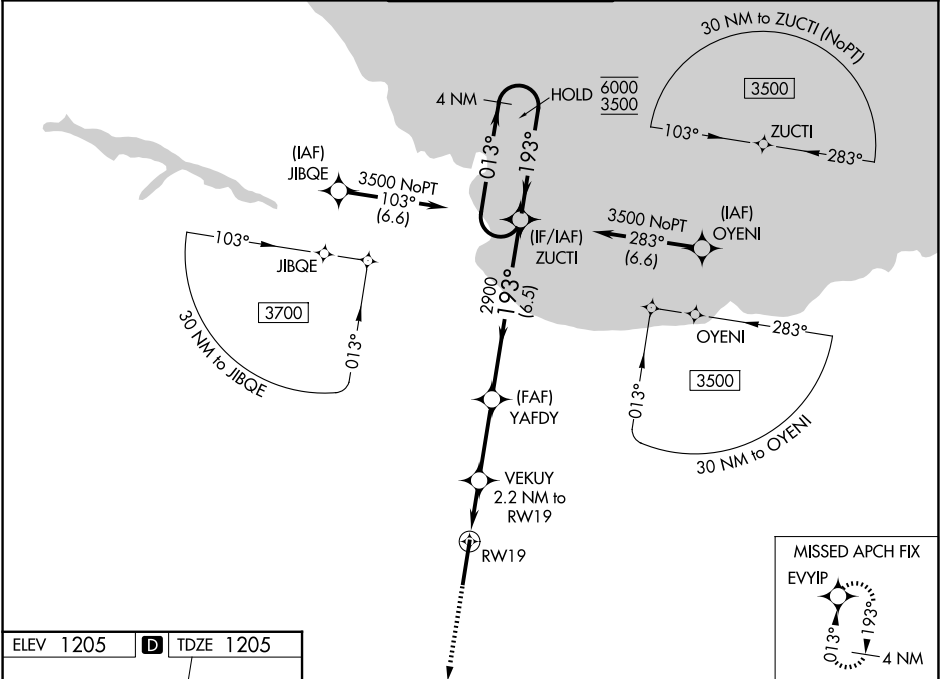

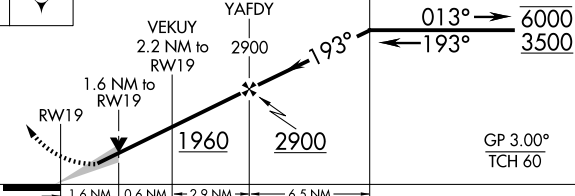3500 ↑		EVYIP 		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).				4 NM Holding Pattern	
									
CATEGORY		A		B		C		D	
LPV DA				1405- ³ / ₄		200 (200- ³ / ₄)			
LNAV/ VNAV DA				1522- ⁷ / ₈		317 (400- ⁷ / ₈)			
LNAV MDA		1620-1 415 (500-1)				1620-1 ¹ / ₈ 415 (500-1 ¹ / ₈)			
CIRCLING		1680-1 475 (500-1)				1820-1 ³ / ₄ 615 (700-1 ³ / ₄)		1820-2 615 (700-2)	