

WAAS CH 82708 W27A	APP CRS 274°	Rwy Ldg TDZE Apt Elev	9501 1027 1027
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 27

KANSAS CITY INTL (MCI)

RNP APCH - GPS.


▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to 1½ SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1600 then climbing left turn to 4000 direct RUGBB and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

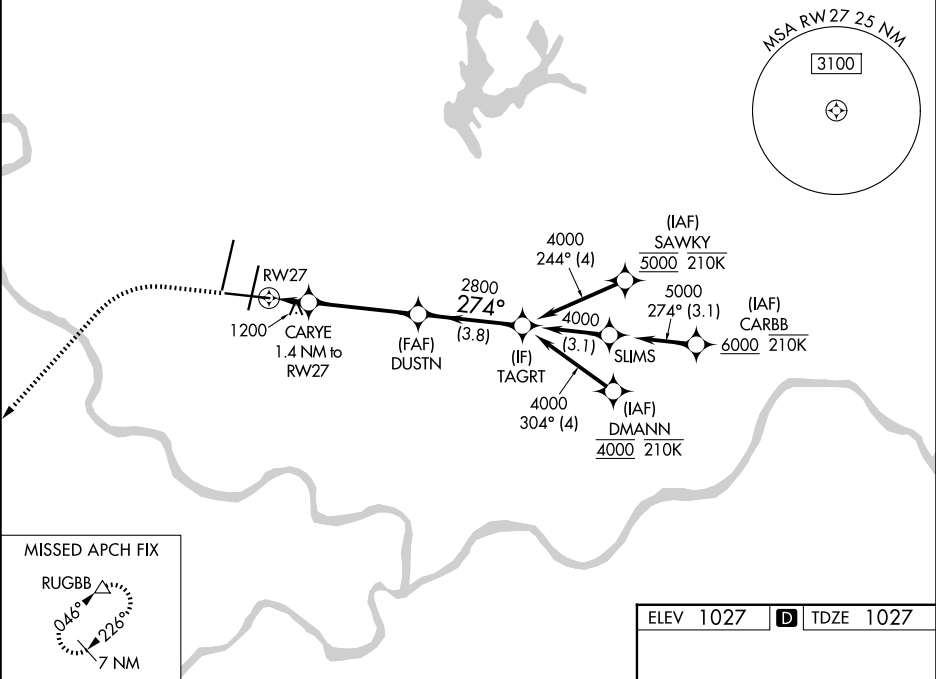

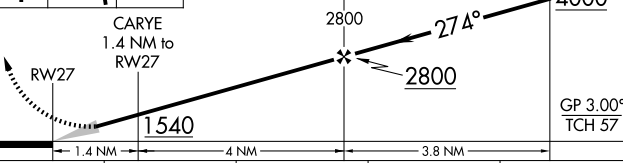1600	4000	RUGBB △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 72°)		TAGRT
					
		CARYE 1.4 NM to RW27	DUSTN 2800	27.4°	4000
		1540		2800	GP 3.00° TCH 57
	1.4 NM	4 NM	3.8 NM		
CATEGORY	A	B	C	D	
LPV DA*	1227/24 200 (200-½)				
LNAV/ VNAV DA	1496/50 469 (500-1)				
LNAV MDA	1460/24 433 (500-½)		1460/40 433 (500-¾)		
CIRCLING	1540-1 513 (600-1)		1540-1½ 513 (600-1½)	1580-2 553 (600-2)	

