

VERNAL, UTAH

AL-792 (FAA)



24249

WAAS CH 90241 W35A	APP CRS 349°	Rwy Idg TDZE Apt Elev	7000 5274 5274
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 35
VERNAL RGNL (VEL)

RNP APCH.	MISSED APPROACH: Climb to 7000 then climbing right turn to 10000 direct OHAPE and hold. *Missed approach requires minimum climb of 290 feet per NM to 8600.
▼ ▲ ❄ Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C.	

ASOS 118.125	SALT LAKE CENTER 119.95 377.15	UNICOM 122.7 (CTAF)
------------------------	--	-------------------------------

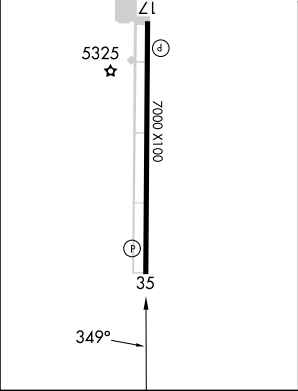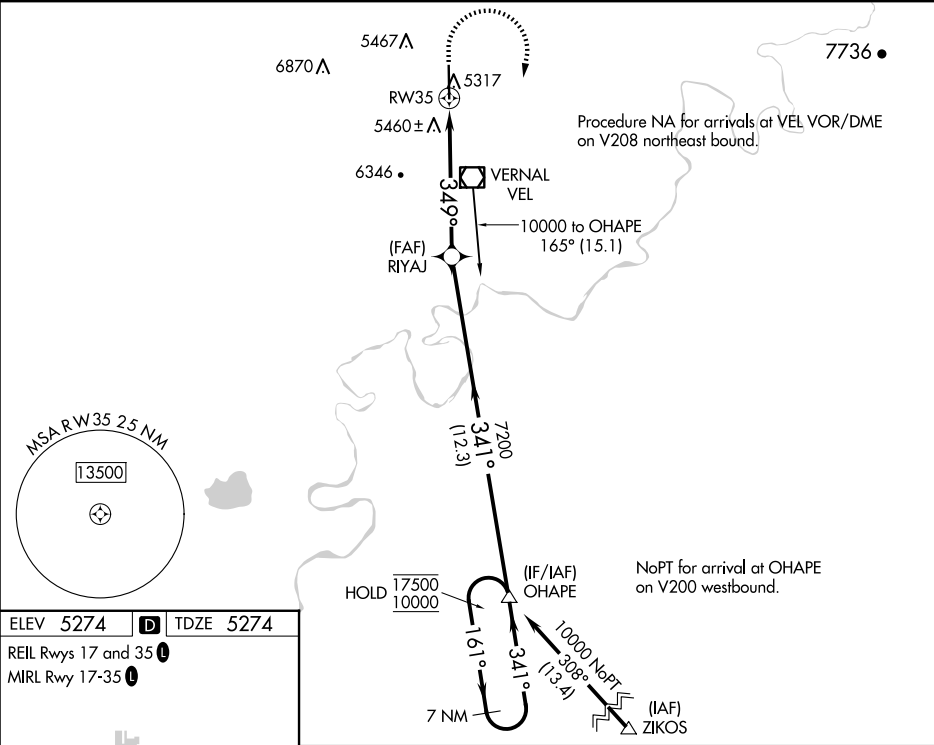

7000	10000	OHAPE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 48).	OHAPE	7 NM Holding Pattern
↑	↘	△			
RIYAJ	7200	341°	161°	17500	10000
RW35	349°	7200	341°	GP 3.10°	TCH 60
5.7 NM	12.3 NM				
CATEGORY	A	B	C	D	
LPV DA*		5610-1	336 (400-1)		
LPV DA		6175-2½	901 (1000-2½)		
LNNAV/VNAV DA*		5786-1⅔	512 (600-1⅔)		
LNNAV/VNAV DA		6093-2½	819 (900-2½)		

VERNAL, UTAH
Orig-B 22APR21

40°26'N-109°31'W

VERNAL RGNL (VEL)

RNAV (GPS) Z RWY 35

SW-4, 04 SEP 2025 to 02 OCT 2025

SW-4, 04 SEP 2025 to 02 OCT 2025