


LOC/DME I-JEF	APP CRS	Rwy Idg	6000
110.5	304°	TDZE	549
Chan 42		Apt Elev	549

ILS or LOC RWY 30

JEFFERSON CITY MEML (JEF)

ADF required. Circling Rwy 9 NA at night. For inop ALS increase S-LOC 30 Cats C/D visibility to 1¾ SM and WAPGY fix minimums: S-LOC 30 Cats C/D visibility to 1 SM.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct ALGOA LOM and hold, continue climb-in-hold to 2800.	
ASOS 133.625	MIZZU APP CON 124.375 353.925	JEFFERSON CITY TOWER★ 125.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95

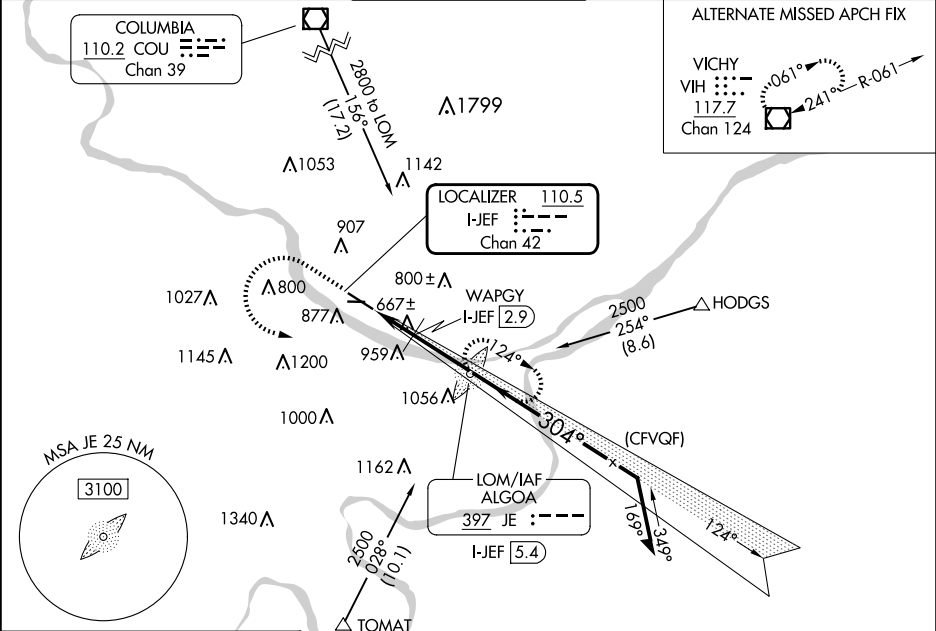


ELEV 549 TDZE 549

HIRL Rwy 12-30
MIRL Rwy 9-27
REIL Rws 9, 12, and 27

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

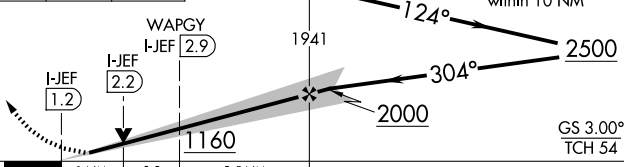1500 ↑	2800 ↖	JE 	JE LOM ALGOA I-JEF 5.4	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).	
			124° Remain within 10 NM 2500 304° 2000 GS 3.00° TCH 54		
CATEGORY	A		B	C	D
S-ILS 30	749-½ 200 (200-½)				
S-LOC 30	1160-½ 611 (700-½)		1160-1¾ 611 (700-1¾)		
 CIRCLING	1280-1 731 (800-1)		1320-2¼ 771 (800-2¼)		1560-3 1011 (1100-3)
WAPGY FIX MINIMUMS					
S-LOC 30	920-½ 371 (400-½)		920-5/8 371 (400-5/8)		
 CIRCLING	1280-1 731 (800-1)		1320-2¼ 771 (800-2¼)		1560-3 1011 (1100-3)