

WAAS CH 63001 W35A	APP CRS 355°	Rwy Ldg TDZE 532 Apt Elev 548
--	------------------------	---

RNAV (GPS) RWY 35

COX FLD (PRX)

RNP APCH - GPS.


▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Baro-VNAV and VDP NA when using SLR altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 859 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1002 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
PUYOS and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875 370.95	UNICOM 122.975 (CTAF) 1
----------------------------	--	--

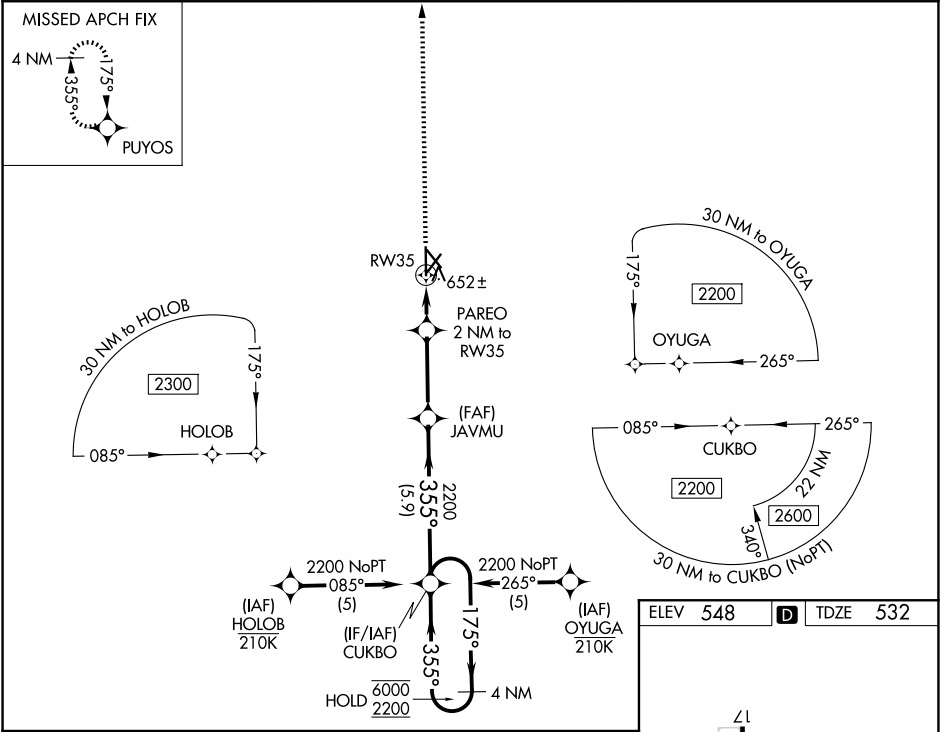

2200	PUYOS	PAREO 2 NM to RW35	JAVMU 2200	CUKBO 4 NM Holding Pattern
1.1 NM to RW35	1.1 NM to RW35	0.9	3.1 NM	5.9 NM
1200	2200	355°	175°	6000 2200
GP 3.00° TCH 40				
CATEGORY	A	B	C	D
LPV DA	782-¾		250 (300-¾)	
LNAV/VNAV DA	925-1½		393 (400-1½)	
LNAV MDA	920-1	388 (400-1)	920-1½	388 (400-1½)
CIRCLING	1060-1	512 (600-1)	1100-1½ 552 (600-1½)	1220-2¼ 672 (700-2¼)

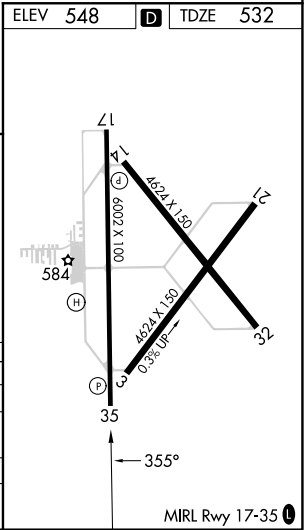

SC-2, 04 SEP 2025 to 02 OCT 2025

SC-2, 04 SEP 2025 to 02 OCT 2025