

WAAS CH 82008 W28A	APP CRS 280°	Rwy Idg 8003 TDZE 196 Apt Elev 201
--	------------------------	---

RNAV (GPS) RWY 28

LAKE CITY GATEWAY (LCQ)



RNP APCH-GPS.

▼ Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, UNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 624 feet and all visibility $\frac{1}{4}$ SM; UNAV/VNAV DA to 640 feet and all visibility $\frac{3}{8}$ SM; increase all MDAs 100 feet and UNAV visibility Cat C and D $\frac{1}{4}$ SM and Circling visibility Cat C $\frac{1}{2}$ SM and Circling Cat D $\frac{1}{4}$ SM. Circling Rwy 10 NA at night.

▲ Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2000 direct
JTUX and hold.

AWOS-3 120.675	JACKSONVILLE CENTER 125.375 254.325	LAKE CITY TOWER ★ 119.2 (CTAF) 0 314.6	GND CON 121.9	UNICOM 122.95
-------------------	--	---	------------------	------------------

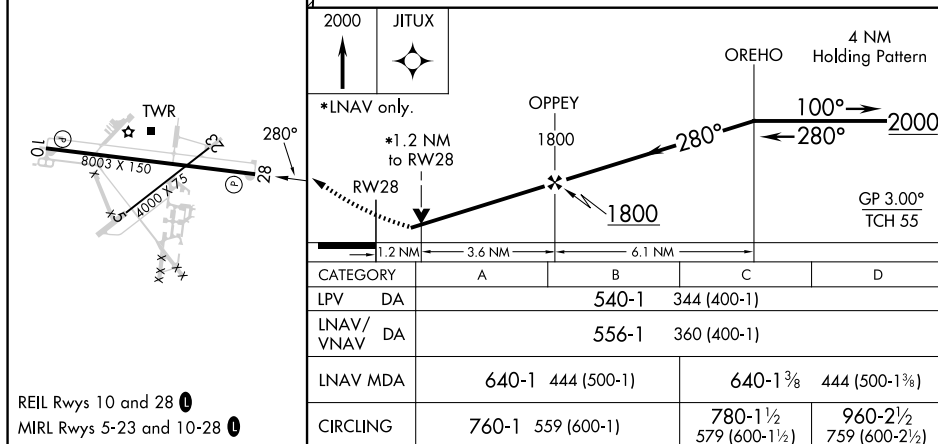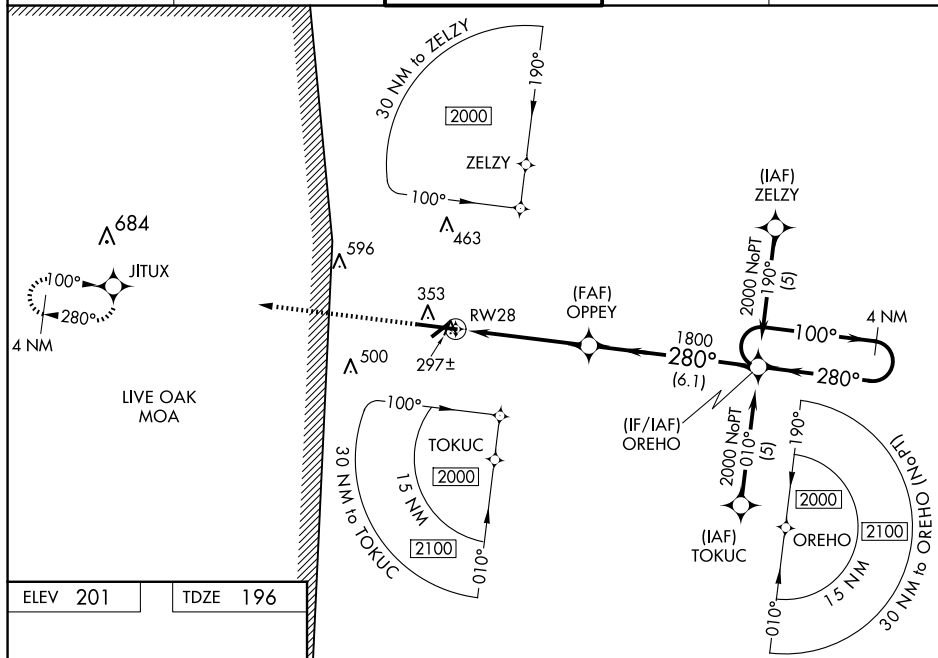

LAKE CITY, FLORIDA
Amdt 1C 15JUL21

30°11'N-82°35'W

LAKE CITY GATEWAY (LCQ)
RNAV (GPS) RWY 28

SE-3, 04 SEP 2025 to 02 OCT 2025

SE-3, 04 SEP 2025 to 02 OCT 2025