


WAAS CH 87115 W05A	APP CRS 053°	Rwy Idg TDZE Apt Elev	6215 947 947
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct ENIVY and hold.		
For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.				
ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6	CLNC DEL 118.55

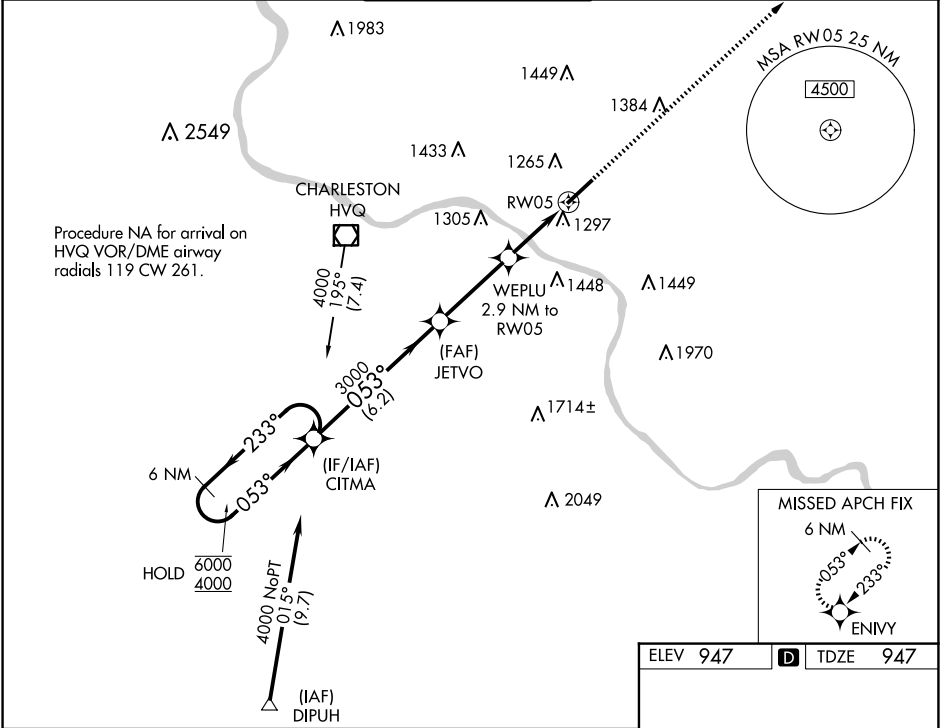

6 NM Holding Pattern		CITMA	JETVO	WEPLU 2.9 NM to RW05	3000	1.7 NM to RW05	RW05	3000	ENIV
6000 ← 233°		053°		053°		*1920		* LNAV only	
4000		3000		3000		3000			
GP 3.00° TCH 56		6.2 NM		3.4 NM		1.2 NM		1.7 NM	
CATEGORY	A	B	C	D					
LPV DA	1147/40		200 (200-¾)						
LNAV/VNAV DA	1584-1¾		637 (700-1¾)						
LNAV MDA	1560/55	613 (700-1)	1560-1¾	613 (700-1¾)					
CIRCLING	1600-1	653 (700-1)	1760-2½ 813 (900-2½)	1880-3 933 (1000-3)					

