


WAAS	APP CRS	Rwy Ldg	6802
CH 65706	064°	TDZE	569
W06A		Apt Elev	569

RNAV (GPS) RWY 6

NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.		CLNC DEL		UNICOM	
Baro-VNAV and VDP NA when using Anniston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Anniston altimeter setting and increase LPV DA to 835, LNAV/VNAV DA to 1040 and all MDA 80 feet; increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats 1/4 SM and increase LNAV Cats C/D and Circling Cat C visibility 1/4 SM.		120.05 257.7		122.725 (CTAF) 0	
AWOS-3PT		BIRMINGHAM APP CON			
127.825		125.45 279.65			

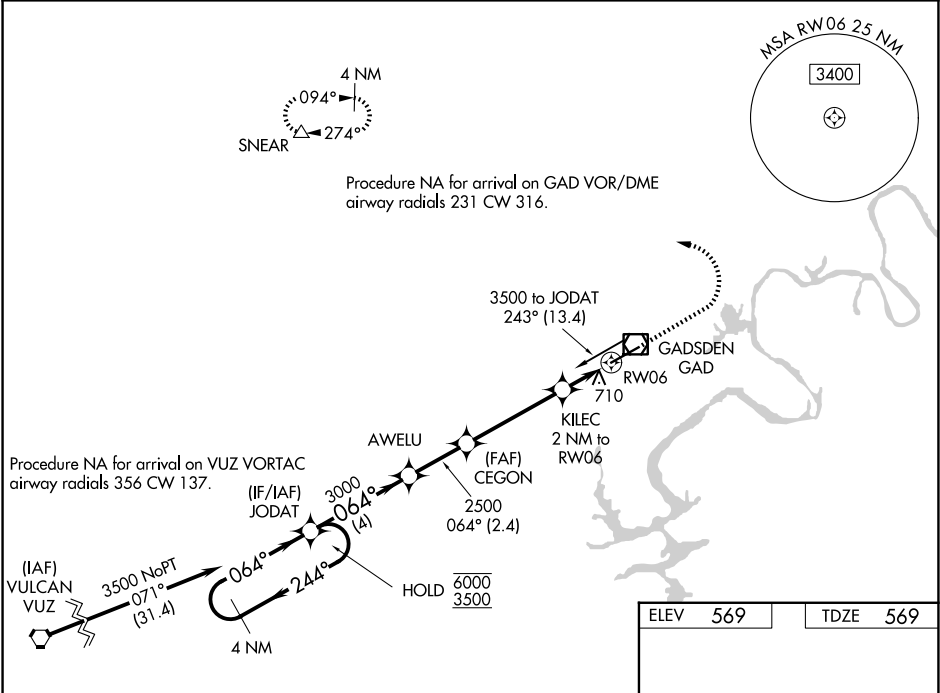

4 NM Holding Pattern				JODAT	AWELU	CEGON	KILEC 2 NM to RW06	1300 ↑	3500 ↖	SNEAR △
6000 ← 244°		064° →		064°	3000	2500	1240	1.1 NM to RW06		
GP 3.00° TCH 40				2500	1240			RW06		
		4 NM		2.4 NM	3.9 NM	0.9 NM	1.1 NM			
CATEGORY	A		B		C		D			
LPV DA			769-3/4		200 (200-3/4)					
LNAV/ VNAV DA			960-1 1/8		391 (400-1 1/8)					
LNAV MDA	960-1		391 (400-1)		960-1 1/8		391 (400-1 1/8)			
CIRCLING	1100-1		531 (600-1)		1440-2 1/2 871 (900-2 1/2)		1680-3 1111 (1200-3)			

