

WAAS CH 40420 W18A	APP CRS 178°	Rwy Idg TDZE 206 Apt Elev 206
--	------------------------	---

RNAV (GPS) RWY 18

PINEBLUFF RGNL/GRIDER FLD (PBF')

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. When local altimeter setting not received, use Stuttgart altimeter setting and increase LPV DA to 534 feet; increase LNAV/VNAV DA to 723 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase LNAV Cats A/B visibility to 1 SM and Cats C/D visibility to 1½ SM. For inop ALS when using Stuttgart altimeter setting, increase LPV all Cats visibility to 1 SM; increase LNAV/VNAV all Cats visibility to 1½ SM; increase LNAV Cats C/D visibility 1½ SM.

MALSR


MISSED APPROACH:
Climb to 2000 direct
REROY and hold.

ASOS
120.775

LITTLE ROCK APP CON
119.85 353.6

CINC DEL
119.85

UNICOM
123.0 (CTAF) 0

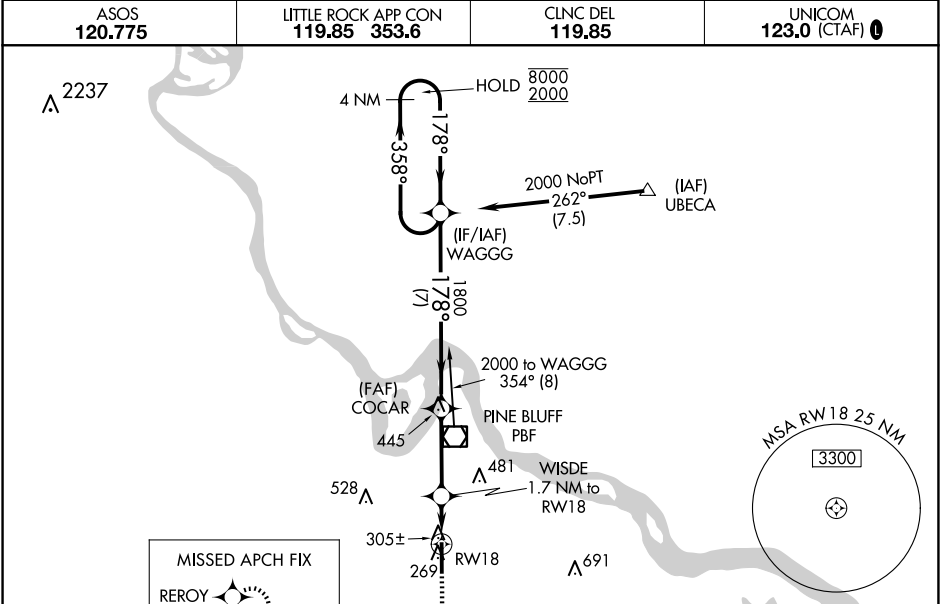

ELEV 206		TDZE 206	
2000		REROY	
1.1 NM to RW18		1.7 NM to RW18	
RW18		COCAR 1800	
780		WAGGG 1800	
1.1		0.6	
3.2		7 NM	
CATEGORY		A	
LPV DA		459-¾ 253 (300-¾)	
LNAV/VNAV DA		648-1 442 (500-1)	
LNAV MDA		600-¾ 394 (400-¾)	
CIRCLING		660-1 454 (500-1)	
		680-1 474 (500-1)	
		840-1¾ 634 (700-1¾)	
		880-2¼ 674 (700-2¼)	
		GP 3.00° TCH 52	
		4 NM Holding Pattern	
		358° 8000	
		178° 2000	
		MIRL Rwy 18-36 0	