

WAAS CH 86620 W36A	APP CRS 358°	Rwy Idg TDZE Apt Elev	5998 202 206
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 36
PINEBLUFF RGNL/GRIDER FLD (PBF)

RNP APCH - GPS.


▼ Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. When local altimeter setting not received, use Stuttgart altimeter setting and increase LPV DA to 527 feet. Increase LNAV/VNAV DA to 562 feet. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2000 direct WAGGG and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

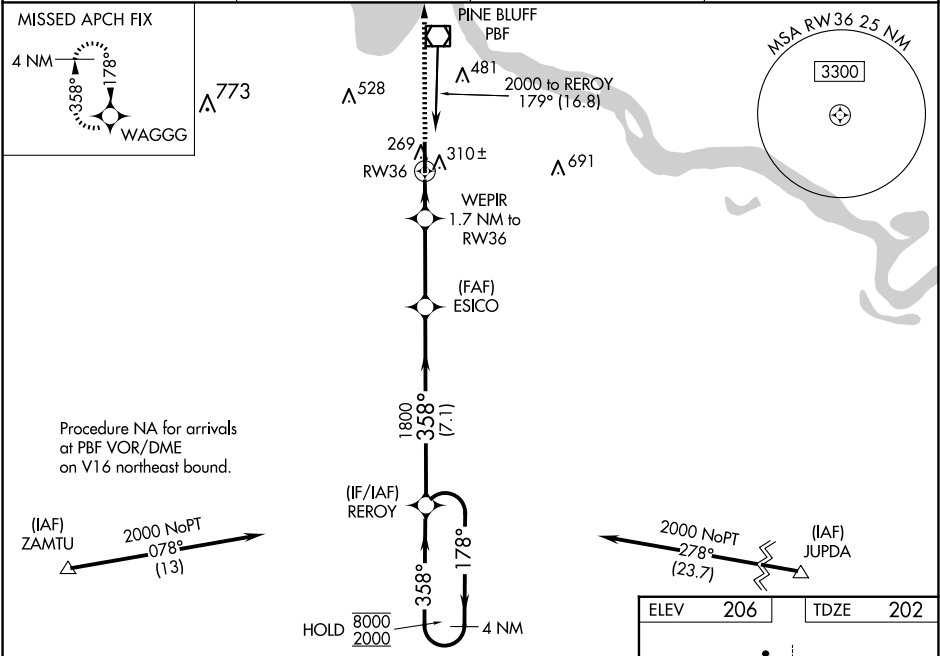

4 NM Holding Pattern		REREOY		2000 WAGGG	
8000 ← 178°		2000 → 358°		358°	
GP 3.00°		TCH 52		1800	
		ESICO		1800	
		WEPIR		1.7 NM to RW36	
				1.1 NM to RW36	
				RW36	
				0.6	
				1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	452-1 250 (300-1)				
LNAV/VNAV DA	487-1 285 (300-1)				
LNAV MDA	600-1 398 (400-1)		600-1 398 (400-1 1/8)		
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 634 (700-1 3/4)	880-2 674 (700-2 1/4)	

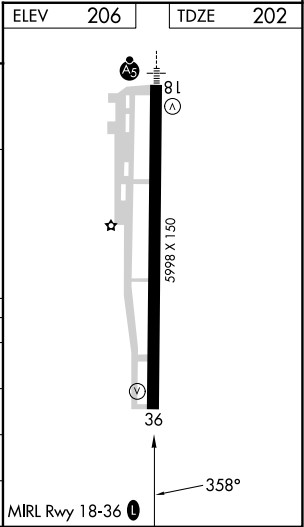

SC-1, 04 SEP 2025 to 02 OCT 2025

SC-1, 04 SEP 2025 to 02 OCT 2025