


|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-NQA | APP CRS | Rwy Ldg  | 8001 |
| 109.75        | 219°    | TDZE     | 322  |
| Chan 34 (Y)   |         | Apt Elev | 322  |

ILS or LOC RWY 22


MILLINGTON/MEMPHIS (NQA)

|                                                   |                                                                                                                                                                                           |       |                                                                                                                                                         |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| RADAR required for procedure entry. DME required. |                                                                                                                                                                                           | MALSR | MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 and on MEM VORTAC R-002 to OZSOM/MEM 23.8 DME and hold, continue climb-in-hold to 3000. |
| <div><div></div><div></div></div>                 | S-ILS 22 procedure NA when control tower closed if ceiling/visibility lower than 800/2. For inop ALS, increase S-ILS 22 Cat E visibility to ¾ SM and S-LOC 22 Cat E visibility to 1 ½ SM. |       |                                                                                                                                                         |

|         |                 |             |                       |         |        |
|---------|-----------------|-------------|-----------------------|---------|--------|
| AWOS-3  | MEMPHIS APP CON |             | MILLINGTON TOWER ★    | GND CON | UNICOM |
| 118.925 | 119.1           | 291.6       | 120.25 (CTAF) 0 340.2 | 121.375 | 122.95 |
|         | 125.8           | 338.3       |                       |         |        |
|         |                 | (176°-355°) |                       |         |        |
|         |                 | (356°-175°) |                       |         |        |

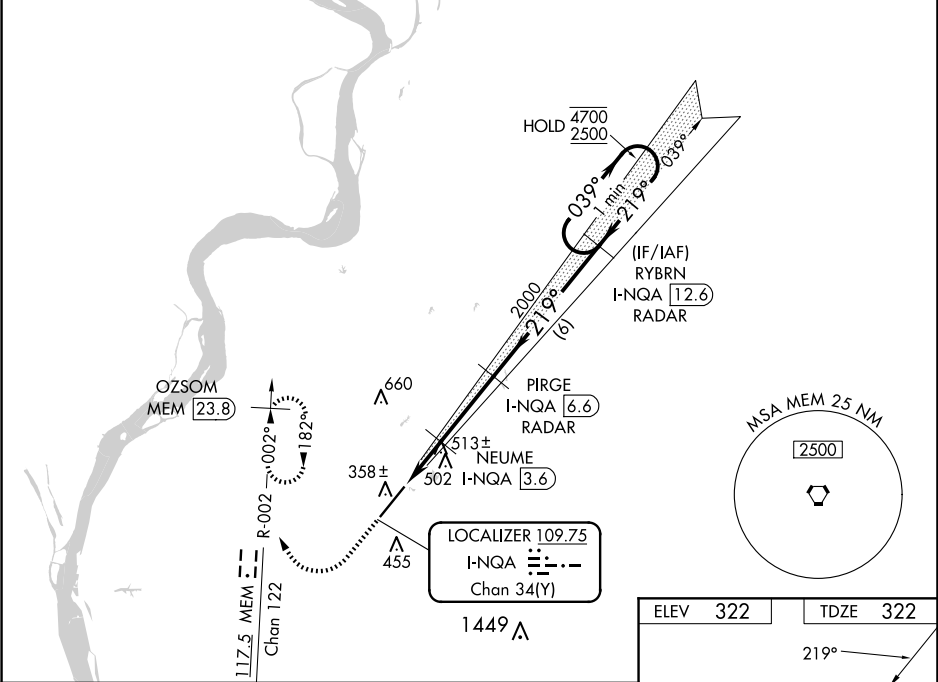

|      |      |                |                                                                 |                            |
|------|------|----------------|-----------------------------------------------------------------|----------------------------|
| 1000 | 3000 | OZSOM MEM 23.8 | VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 67). | One Minute Holding Pattern |
|      |      |                |                                                                 |                            |

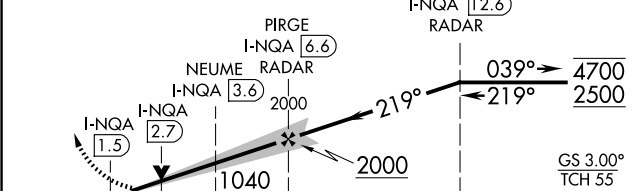

|          |                   |             |              |             |              |
|----------|-------------------|-------------|--------------|-------------|--------------|
| CATEGORY | A                 | B           | C            | D           | E            |
| S-ILS 22 | 522-½ 200 (200-½) |             |              |             |              |
| S-LOC 22 | 780-½             | 458 (500-½) | 780-¾        | 458 (500-¾) |              |
| CIRCLING | 800-1             | 820-1       | 920-1½       | 960-2       | 960-2¼       |
|          | 478 (500-1)       | 498 (500-1) | 598 (600-1½) | 638 (700-2) | 638 (700-2¼) |

