

WAAS CH 99417 W17A	APP CRS 173°	Rwy Idg TDZE 1553 Apt Elev 1563
--	------------------------	---



RNAV (GPS) RWY 17

HOBART RGNL (HBR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Altus/Quartz Mountain altimeter setting. VDP NA with Altus/Quartz Mountain altimeter setting.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

ASOS 133.325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	---------------------------------------	-------------------------------

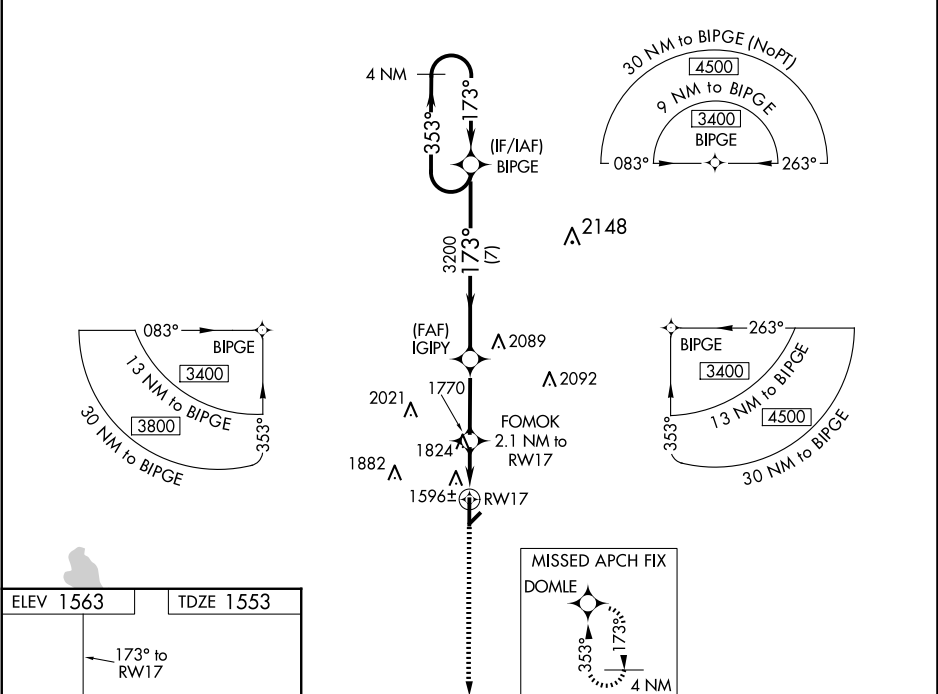

ELEV 1563		TDZE 1553	
MIRL Rwy 17-35		MIRL Rwy 17-35	
4000		DOMLE	
*LNAV only.		FOMOK 2.1 NM to RW17	
RW17		IGIPY	
1.6		3200	
0.5		2240*	
2.9 NM		7 NM	
CATEGORY		A	
LPV DA		1803-1 250 (300-1)	
LNAV/VNAV DA		1900-1¼ 347 (400-1¼)	
LNAV MDA		2080-1 527 (600-1)	
CIRCLING		2080-1 517 (600-1)	
		2080-1½ 527 (600-1½)	
		2080-1¾ 527 (600-1¾)	
		2320-2¼ 757 (800-2¼)	
		2460-3 897 (900-3)	