


WAAS CH 53417 W35A	APP CRS 353°	Rwy Idg 5507 TDZE 1561 Apt Elev 1563
--	------------------------	---

RNAV (GPS) RWY 35
HOBTART RGNL (HBR)


⚠ For uncompensated Baro-VNAV systems, UNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Alhus/Quartz Mountain Rgnl altimeter setting and increase LPV DA to 1882 feet and visibility all Cts ¼ SM; increase UNAV/VNAV DA to 2020 feet and visibility all Cts ½ SM; increase all MDAs 80 feet and Circling Cts C visibility ¼ SM. Baro-VNAV NA when using Alhus/Quartz Mountain Rgnl altimeter setting. VDP NA with Alhus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct BIPGE and hold.


ASOS 133.325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	---------------------------------------	-------------------------------

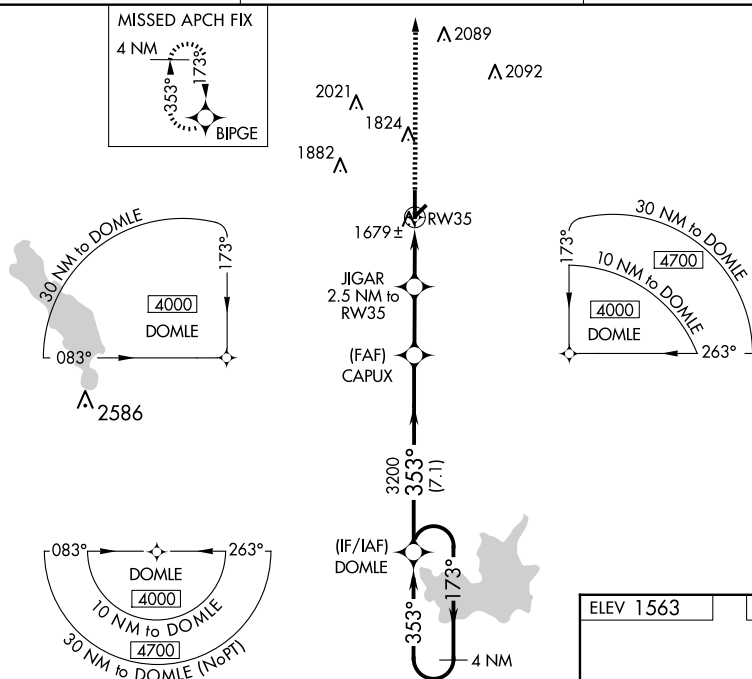

ELEV 1563		TDZE 1561
-----------	--	-----------

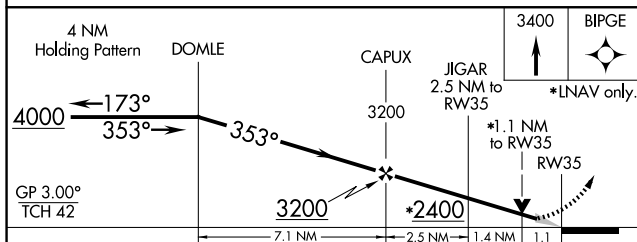

CATEGORY	A	B	C	D
LPV DA		1811-1	250 (300-1)	
LNAV/ VNAV DA		1949-1¼	388 (400-1¼)	
LNAV MDA	1940-1	379 (400-1)	1940-1½ 379 (400-1½)	1940-2 379 (400-2)
CIRCLING	1980-1 417 (500-1)	2020-1 457 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

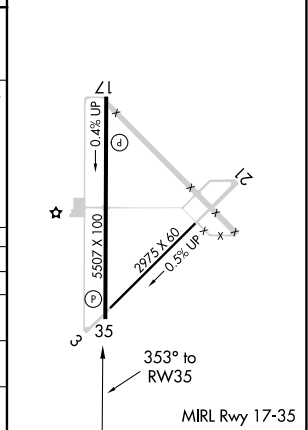

RNAV (GPS) RWY 35