


ATIS ★ 125.55 363.05		TACAN required		Rwy	Knots	60	120	180	240	300	360
CLNC DEL				★ 03 (A)	V/V(fpm)	205	410	615	820	1025	1230
120.75 279.55				† 03 (B)	V/V(fpm)	215	430	645	860	1075	1290
GND CON				† 21 (B)	V/V(fpm)	232	464	696	928	1160	1392
121.6 360.2				† 27 (B)	V/V(fpm)	212	424	636	848	1060	1272
TOWER ★											
124.85 290.375				* Minimum † ATC Climb Rate							
DEP CON				(A) to 700							
128.65 307.275				(B) to 5500							

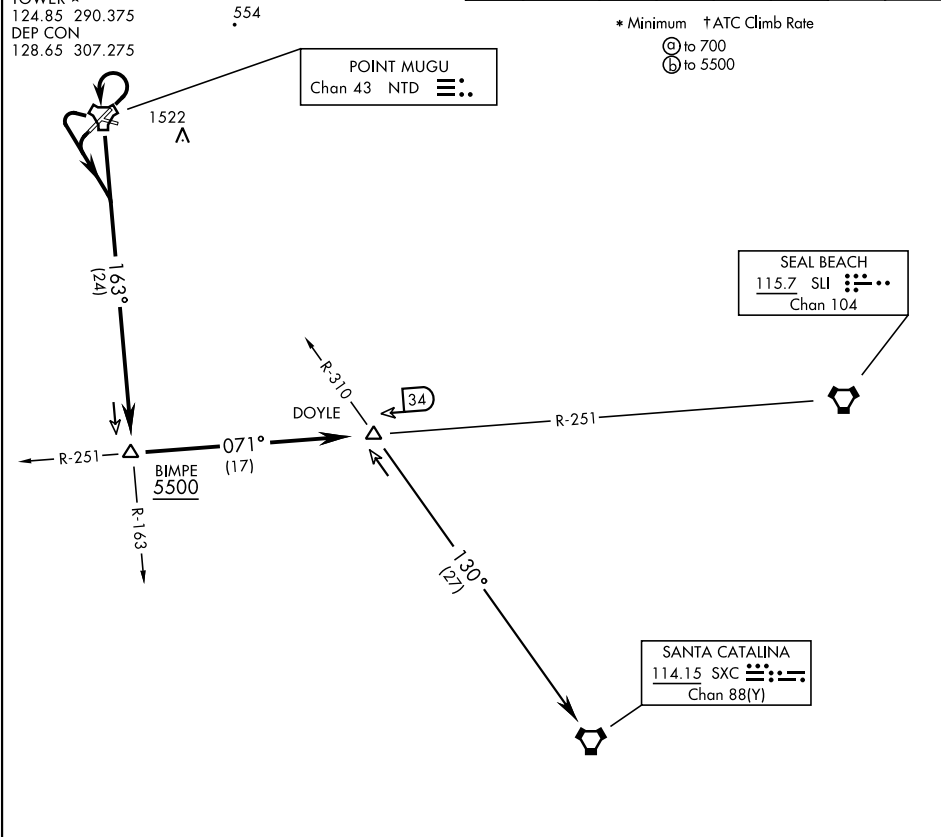

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3: Climbing left turn within 3 DME of NTD TACAN, direct NTD, thence...

TAKEOFF RWY 21, 27: Left turn, thence...

...intercept NTD R-163 and via NTD R-163 to BIMPE (NTD R-163/24 DME), then via SLI VORTAC R-251 to DOYLE, then via assigned routing. Cross BIMPE at or above 5500.

SANTA CATALINA TRANSITION (DOYLE 9.SXC): DOYLE (SLI R-251/34 DME) to SANTA CATALINA VORTAC via SXC R-310. Then as filed.