

|                                        |                        |                                                   |             |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|
| WAAS<br>CH <b>82617</b><br><b>W04A</b> | APP CRS<br><b>043°</b> | Rwy Idg<br>TDZE <b>806</b><br>Apt Elev <b>808</b> | <b>6701</b> |
|----------------------------------------|------------------------|---------------------------------------------------|-------------|

RNAV (GPS) RWY 4

SOUTHERN WISCONSIN RGNL (JVL)



⚠ Circling to Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA with Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1075 feet, LNAV/VNAV DA to 1314 feet and all MDAs 80 feet; increase LNAV Cat C and Circling Cats C/D visibility ¼ SM. For inop ALS, when using Rockford altimeter setting increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ⅜ SM.

MALSR



MISSED APPROACH:  
Climb to 3100 direct  
OTLEE and hold.

|                       |                                        |                                                   |                          |                           |                         |
|-----------------------|----------------------------------------|---------------------------------------------------|--------------------------|---------------------------|-------------------------|
| ATIS<br><b>128.25</b> | ROCKFORD APP CON<br><b>121.0 327.0</b> | JANESVILLE TOWER ★<br><b>118.8 (CTAF) 0 225.4</b> | GND CON<br><b>121.65</b> | CLNC DEL<br><b>121.65</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------|---------------------------------------------------|--------------------------|---------------------------|-------------------------|

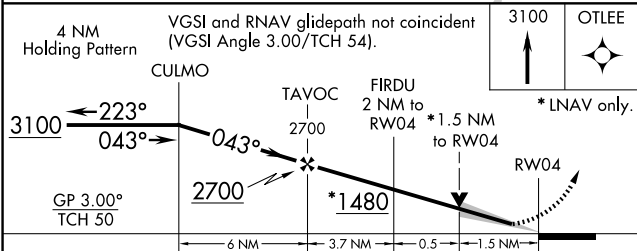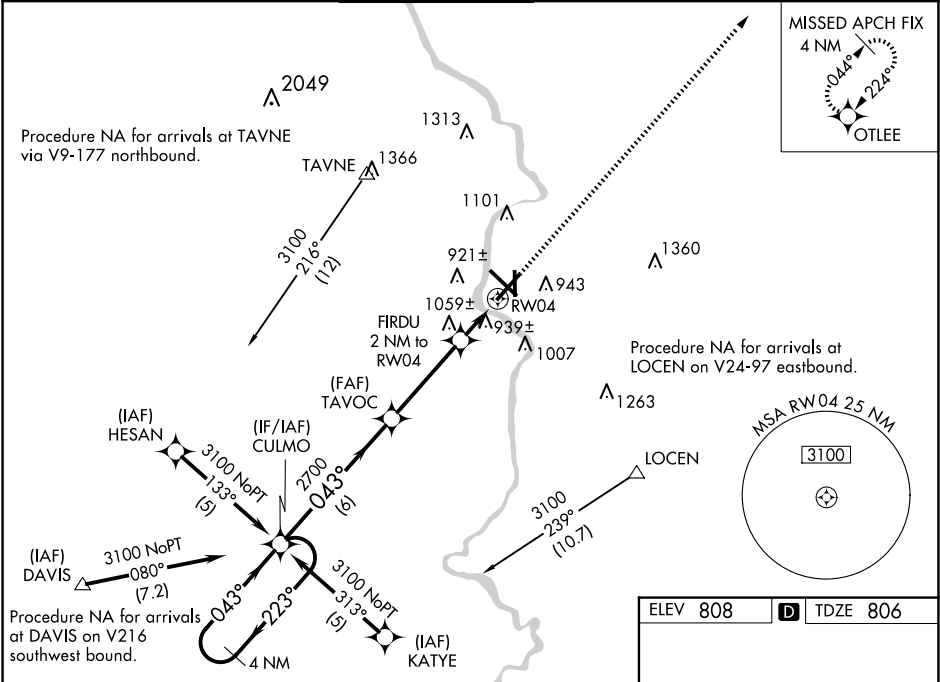

| CATEGORY     | A                      | B                          | C                      | D |
|--------------|------------------------|----------------------------|------------------------|---|
| LPV DA       |                        | 1006-1/2                   | 200 (200-1/2)          |   |
| LNAV/VNAV DA |                        | 1245-1                     | 439 (500-1)            |   |
| LNAV MDA     | 1320-1/2 514 (600-1/2) | 1320-1 514 (600-1)         | 1320-1 514 (600-1 1/4) |   |
| CIRCLING     | 1320-1 512 (600-1)     | 1420-1 3/4 612 (700-1 3/4) | 1460-2 652 (700-2)     |   |

