

WAAS CH 42832 W20A	APP CRS 203°	Rwy Idg TDZE 339 Apt Elev 342
--	------------------------	---

RNAV (GPS) RWY 20

CAPE GIRARDEAU RGNL (CGI)


RNP APCH-GPS.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Cairo altimeter setting and increase LPV DA to 637 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 652 feet; increase all MDAs 60 feet; increase LNAV and Circling visibility Cats C and D $\frac{1}{4}$ SM. Rwy 20 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using Cairo altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZUGUB and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

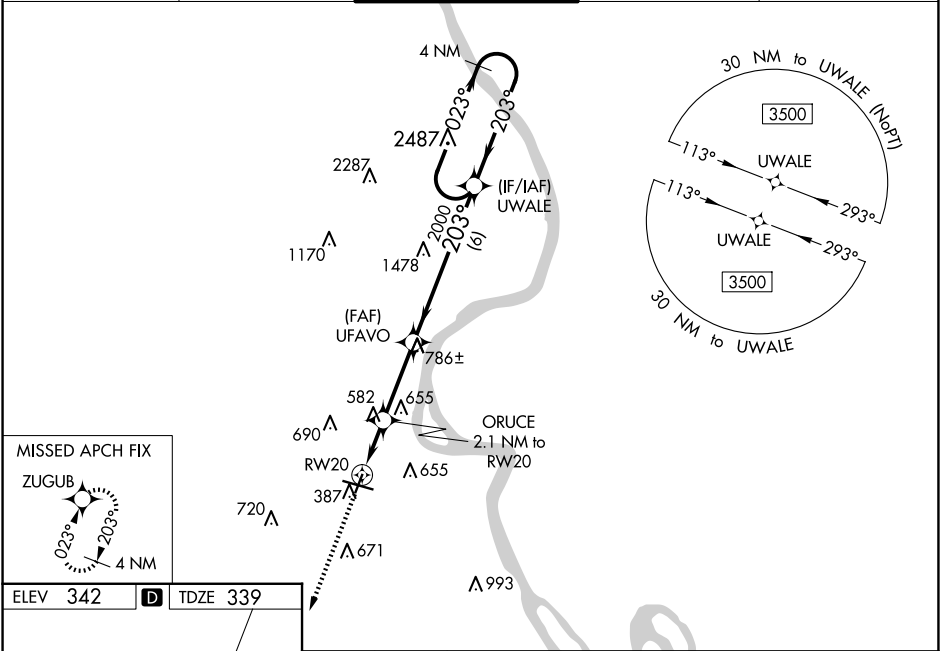

ELEV **342** **D** TDZE **339**

MIRL Rwy 2-20 **0**
HIRL Rwy 10-28 **0**

3000	ZUGUB	ORUCE 2.1 NM to RW20	UFAVO	UWALE	4 NM Holding Pattern
1.4 NM to RW20	1.4 NM to RW20	2000	203°	023°	3500
1.4 NM	0.7	3 NM	6 NM	GP 3.00° TCH 43	
CATEGORY	A	B	C	D	
LPV DA	589-1 250 (300-1)				
LNAV/VNAV DA	604-1 265 (300-1)				
LNAV MDA	840-1	501 (500-1)	840-1 $\frac{3}{8}$	501 (500-1 $\frac{3}{8}$)	
CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-1 $\frac{3}{4}$ 658 (700-1 $\frac{3}{4}$)	1080-2 $\frac{1}{4}$ 738 (800-2 $\frac{1}{4}$)	

NC-3, 04 SEP 2025 to 02 OCT 2025

NC-3, 04 SEP 2025 to 02 OCT 2025