

WAAS CH 66010 W06A	APP CRS 059°	Rwy Ldg TDZE 94 Apt Elev 99	7006
--	------------------------	---	-------------

RNAV (GPS) RWY 6


LONG ISLAND MAC ARTHUR (ISP)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Shirley altimeter setting. When local altimeter setting not received, use Shirley altimeter setting and increase all DA 28 feet and all MDA 40 feet, increase LNAV/VNAV all Cats visibility to RVR 3000 and LNAV Cat C and D visibility to 4500. Increase Circling Cat C and D visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat C and D to RVR 6000. For inoperative MALSR when using Shirley altimeter setting increase LNAV/VNAV all Cats visibility to RVR 5000. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Shirley altimeter setting.

MALSR

MISSED APPROACH:
Climb to 600 then climbing right turn to 2000 direct CCC VOR/DME and hold.

ATIS 120.725	NEW YORK APP CON 120.05 343.75	LONG ISLAND TOWER* 119.3 (CTAF) 0335.5	GND CON 135.3	CLNC DEL 121.85	UNICOM 122.95
------------------------	--	--	-------------------------	---------------------------	-------------------------

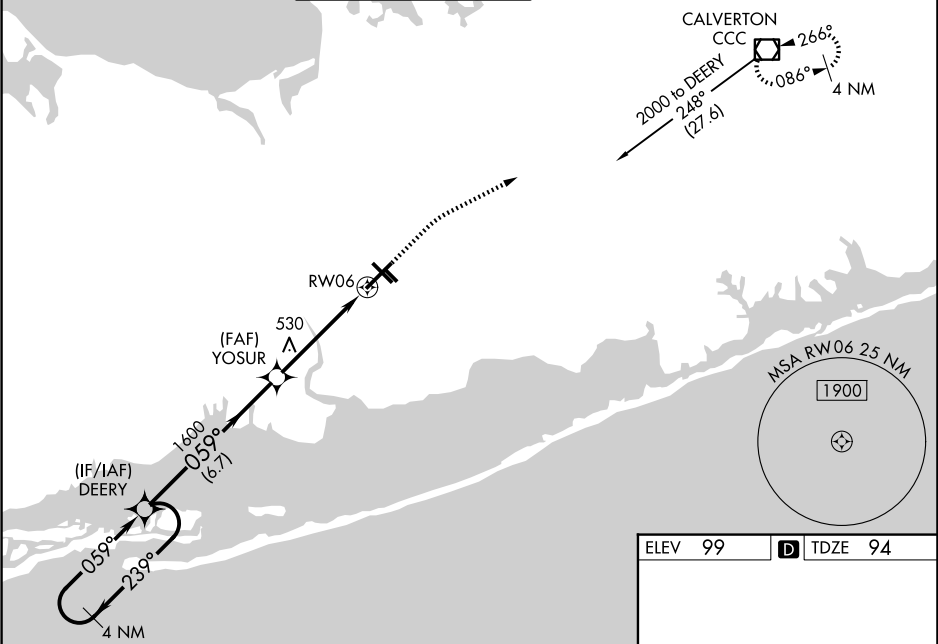

4 NM Holding Pattern					600		2000		CCC
DEERY					↑		↻		☐
2000 ← 239°					059° →		059°		*LNAV only.
GP 3.00° TCH 52					1600		1600		
					6.7 NM		3.5 NM		
					1.1 NM		1.1 NM		
CATEGORY	A		B		C		D		
LPV DA			**294/24		200 (200-½)				
LNAV/VNAV DA			385/24		291 (300-½)				
LNAV MDA	500/24		406 (500-½)		500/40		406 (500-¾)		
CIRCLING	600-1 501 (600-1)		660-1 561 (600-1)		660-1½ 561 (600-1½)		960-2¾ 861 (900-2¾)		

ELEV 99

TDZE 94