

WAAS CH 69610 W03A	APP CRS 030°	Rwy Ldg TDZE Apt Elev	5204 700 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3


CLINTON MUNI (CWI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Davenport altimeter setting. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet.

MALSR

MISSED APPROACH: Climb to 2500 direct CUDMA and hold.

AWOS-3PT 125.525	QUAD CITY APP CON ★ 125.95 257.8	CLNC DEL 118.5 0	UNICOM 123.075 (CTAF)
----------------------------	--	----------------------------	---------------------------------

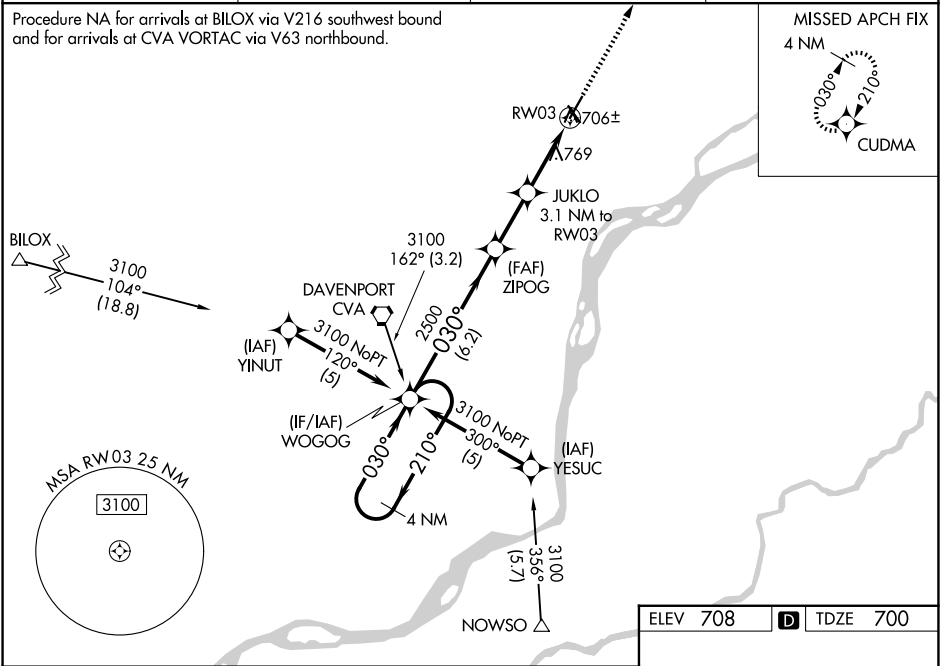

4 NM Holding Pattern

WOGOG

3100 ← 210° / → 030°

GP 3.00° TCH 56

2500

ZIPOG

JUKLO 3.1 NM to RW03

*1.1 NM to RW03

RW03

*LNNAV only

*1740

6.2 NM, 2.3 NM, 2 NM, 1.1 NM

CATEGORY	A	B	C	D
LPV DA	900-½ 200 (200-½)			NA
LNNAV/VNAV DA	1039-¾ 339 (400-¾)			NA
LNNAV MDA	1020-½ 320 (400-½)			NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1½ 532 (600-1½)	NA

