

WAAS CH 48912 W32A	APP CRS 319°	Rwy Ldg 6400 TDZE 53 Apt Elev 53
--	------------------------	---

RNAV (GPS) RWY 32

SALISBURY-OCEAN CITY WICOMICÓ RGNL (SBY)

RNP APCH

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. When local altimeter setting not received use Georgetown altimeter setting: increase LPV DA to 305 feet; increase LNAV/VNAV DA to 510; increase all MDA 60 feet and LNAV Cat C and Circling Cat D visibility ¼ SM. For inoperative MALSR, increase LNAV Cat D visibility to 1¼ SM.



A VDP and Baro-VNAV NA when using Georgetown altimeter setting.

MALSR




MISSED APPROACH:
Climb to 2100 direct
HYDRS and hold.


ASOS 118.325	PATUXENT APP CON ★ 127.95 314.0	SALISBURY TOWER ★ 119.425 (CTAF) 0	GND CON 123.775	CLNC DEL 123.775	CLNC DEL 132.45 (When twr closed)	UNICOM 122.95
------------------------	---	--	---------------------------	----------------------------	--	-------------------------

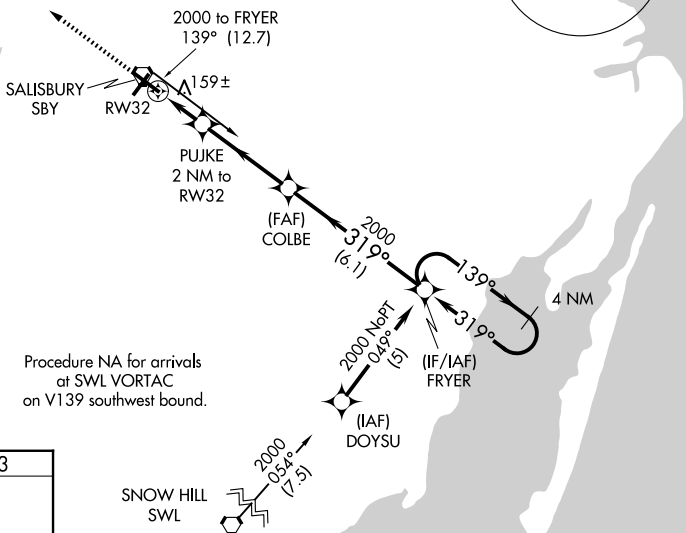

ELEV 53	D	TDZE 53
---------	----------	---------



REIL Rwys 5, 14 and 23 **L**
MIRL Rwy 5-23 **L**
HIRL Rwy 14-32 **L**

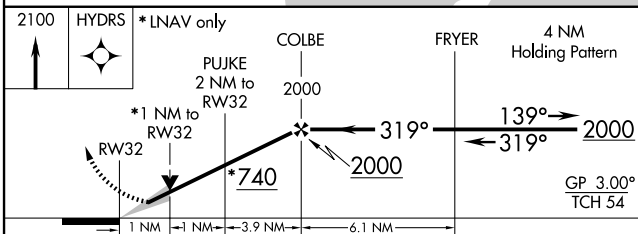

CATEGORY	A	B	C	D
LPV DA	253-1/2 200 (200-1/2)			
RNAV/DA	458-1 405 (500-1)			
RNAV MDA	420-1/2 367 (400-1/2)			420-1 367 (400-1)
CIRCLING	480-1 427 (500-1)	520-1 467 (500-1)	560-1 1/2 507 (600-1 1/2)	700-2 647 (700-2)