

LOM IC	APP CRS	Rwy Ldg
332	016°	7302
		TDZE
		1321
		Apt Elev
		1333

NDB RWY 1R

WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼



▲

For inoperative MALSR, increase S-1R Cat C visibility to RVR 5000.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct PICHE LOM and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON	CLNC DEL
125.15	126.7 353.5	118.2 257.8	121.9 348.6	125.7

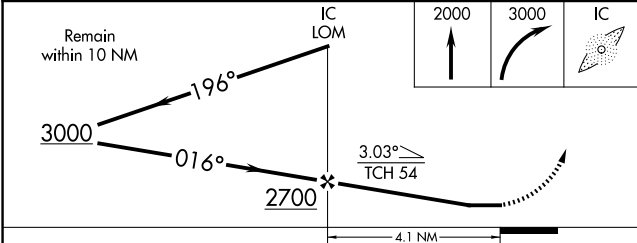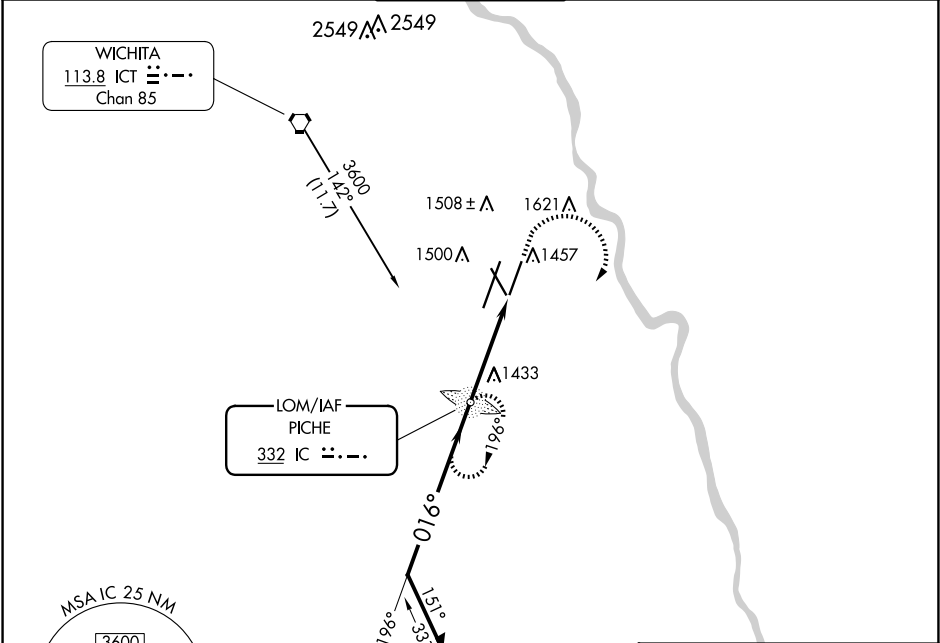

CATEGORY	A	B	C	D
S-1R	1740/40	419 (500-¾)	1740/50	419 (500-1)
CIRCLING	1800-1	467 (500-1)	1980-1¾	1980-2
			647 (700-¾)	647 (700-2)

