
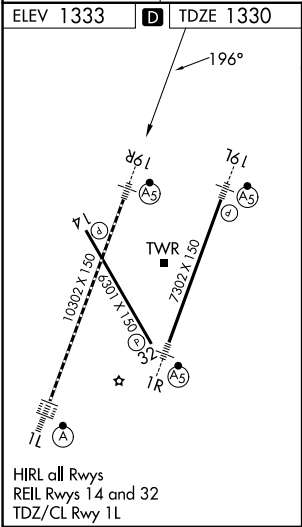


WAAS CH 63019 W19A	APP CRS 196°	Rwy Ldg TDZE 1330 Apt Elev 1333
--	------------------------	---

RNAV (GPS) Y RWY 19R

WICHITA DWIGHT D EISENHOWER NTL (ICT)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.			MALSR 	MISSED APPROACH: Climb to 3600 direct CUTIK and hold.
ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6	CLNC DEL 125.7

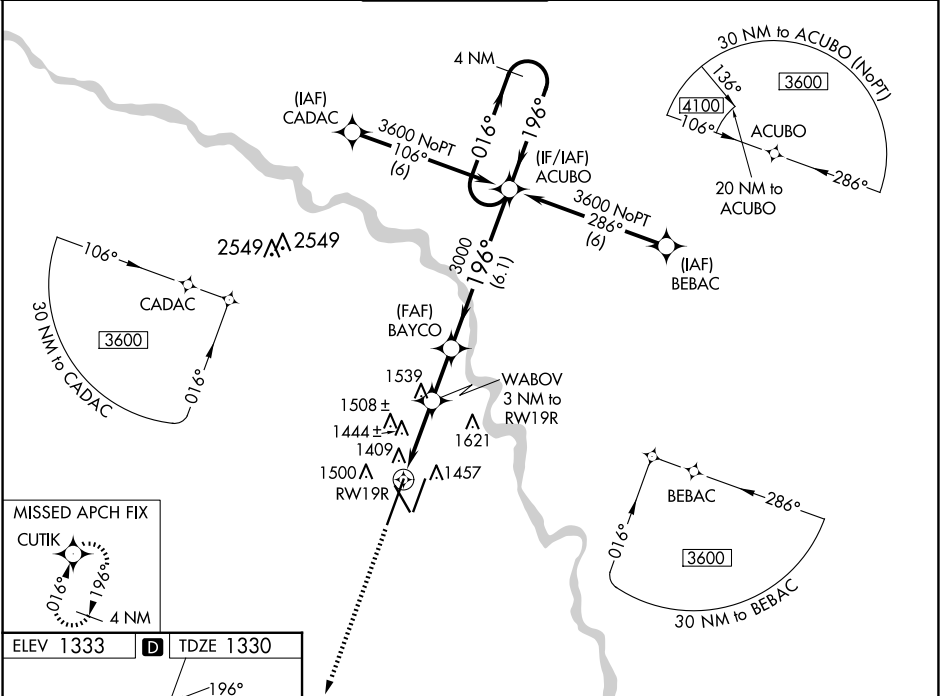

3600 CUTIK		ACUBO 4 NM Holding Pattern	
*LNAV only.		*1.1 NM to RW19R	
RW19R		BAYCO 3000	
2340*		3000	
1.1 NM		1.9 NM	
2 NM		6.1 NM	
CATEGORY	A	B	C
LPV DA #	1530/24	200 (200-½)	
LNAV/VNAV DA	1742/45	412 (500-¾)	
LNAV MDA	1740/24	410 (500-½)	1740/40 410 (500-¾)
CIRCLING	1800-1	467 (500-1)	1980-1¾ 647 (700-1¾) 1980-2 647 (700-2)