

WAAS CH 50517 W18A	APP CRS 184°	Rwy Idg TDZE Apt Elev	4498 22 24
--	------------------------	-----------------------------	---------------------------------------



RNAV (GPS) RWY 18

ARANSAS COUNTY (RKP)

Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH: Climb to 2000 direct YAYUR and on track 108° to PITYI and hold, continue climb-in-hold to 2000.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	--------------------------	----------------------------------

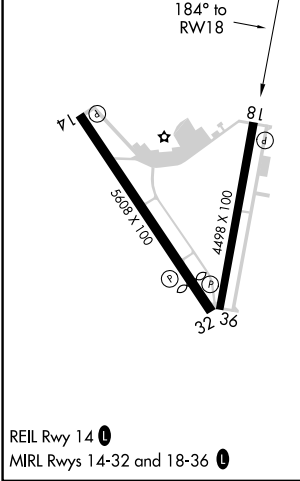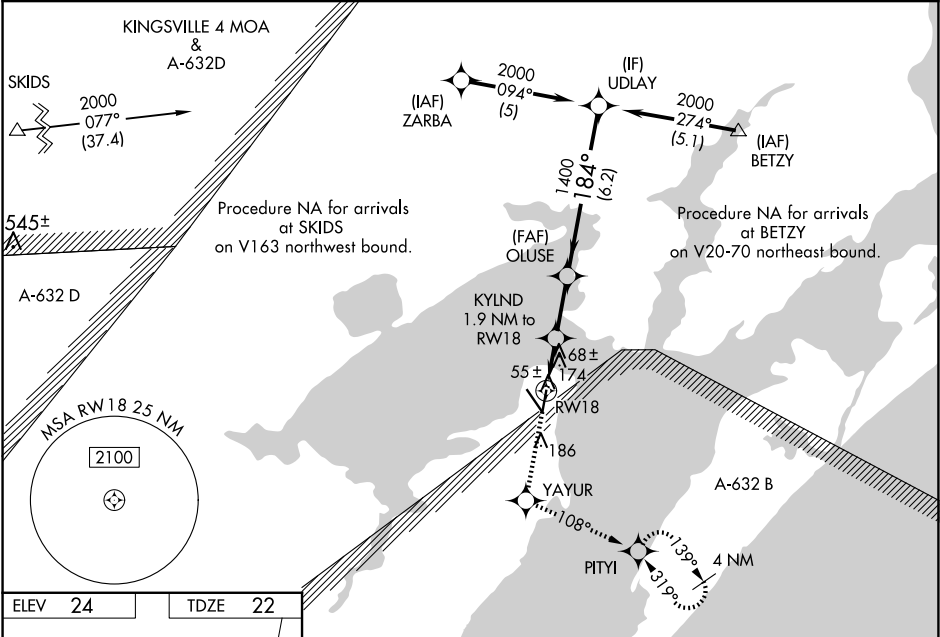

ELEV 24	TDZE 22	Procedure Turn NA			
2000 YAYUR tr 108° PITYI		OLUSE UDLAY 2000			
*LNAV only		KYLND 1.9 NM to RW18			
RW18		*1.2 NM to RW18			
1.2		0.7		2.3 NM	
CATEGORY		A		B	
LPV DA		272-1		250 (300-1)	
LNAV/VNAV DA		459-1½		437 (500-1½)	
LNAV MDA		440-1		418 (500-1)	
CIRCLING		500-1		476 (500-1)	